


General Standards Corporation

High Performance Bus Interface Solutions

PMC-to-PC/104-Plus Adapter User Manual/Specification

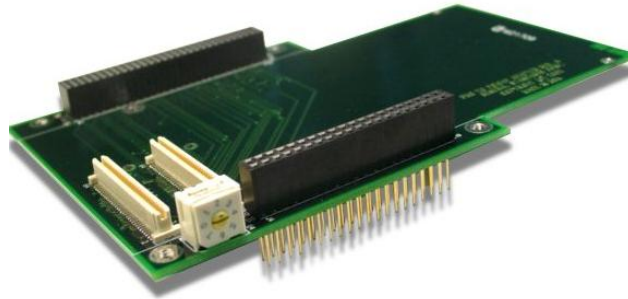

The PMC-to-PC/104-Plus Adapter accommodates one PMC Card to a PC/104-Plus environment. The adapter is stackable and can be used with multiple devices.

PCI Device and Interrupt Assignment

With this product, the device identification and interrupt lines are controlled by the position of the selection switch located at one edge of the module. The selection switch allows the board to be configured as one of four unique devices in a PC104-Plus stack. Positions 0 through 3 provide four unique bus-access configurations, while positions 4 through 7 are unused. The exact relationship or mapping of switch positions and slot-specific signals may vary among manufacturers of PC104-Plus motherboards.

In the PC104-Plus stacking configuration, each of up to four modules is assigned specific communication signals as described in Paragraph 3.2.2 of the PC/104-Plus specification, Version 1.2. Because of the stack-through nature of the bus, slot-specific signals are duplicated for each plug-in module, and include IDSEL[3:0], CLK[3:0], REQ*[2:0], GNT*[2:0] and INT[A-D].

Compatibility: Conforms to PCI Specification 2.3, and the PC/104-Plus Specification 1.2 "Bus-compatible".

Physical Characteristics (Overall, excluding spacers):

Height: 23.3 mm (0.92 in)
Width: 96.0 mm (3.78 in)
Depth: 149.0 mm (5.87 in) (Exceeds standard depth by 2.32 in, to allow a PMC product to be adapted)

Environmental Specifications

Ambient Temperature Range: Operating: -40 to +85 degrees Celsius
Storage: -40 to +85 degrees Celsius

Relative Humidity: Operating: 0 to 80%, non-condensing
Storage: 0 to 95%, non-condensing

Altitude: Operation to 10,000 ft.
Cooling: Conventional convection cooling

General Standards Corporation
8302A Whitesburg Drive - Huntsville, AL 35802
Phone: (256)880-8787 or (800)653-9970
FAX: (256)880-8788
Email: sales@generalstandards.com

General Standards Corporation

High Performance Bus Interface Solutions

ORDERING INFORMATION

Specify the basic product model number followed by an option suffix "- RIO", as indicated below. For example, model number "PMC-to-PC104P Adapter -0 -0" describes a board without RIO installed. If no options are desired, then use only the basic product model number when ordering.

| Optional Parameter | Value | Specify Option As: |
|--------------------|-------------------|--------------------|
| ISA Connector | ISA installed | -0 or leave blank |
| | ISA not installed | -1 |
| Rear I/O | RIO not installed | -0 or leave blank |
| | RIO installed | -1 |

SYSTEM I/O CONNECTIONS

Table 1. System Connector Pin Functions

| CONN1 ROW-A | | CONN1 ROW-B | |
|-------------|----------|-------------|----------|
| CONN1 PIN | P4A4 PIN | CONN1 PIN | P4A4 PIN |
| 34 | I/O - 1 | 34 | I/O - 2 |
| 33 | I/O - 3 | 33 | I/O - 4 |
| 32 | I/O - 5 | 32 | I/O - 6 |
| 31 | I/O - 7 | 31 | I/O - 8 |
| 30 | I/O - 9 | 30 | I/O - 10 |
| 29 | I/O - 11 | 29 | I/O - 12 |
| 28 | I/O - 13 | 28 | I/O - 14 |
| 27 | I/O - 15 | 27 | I/O - 16 |
| 26 | I/O - 17 | 26 | I/O - 18 |
| 25 | I/O - 19 | 25 | I/O - 20 |
| 24 | I/O - 21 | 24 | I/O - 22 |
| 23 | I/O - 23 | 23 | I/O - 24 |
| 22 | I/O - 25 | 22 | I/O - 26 |
| 21 | I/O - 27 | 21 | I/O - 28 |
| 20 | I/O - 29 | 20 | I/O - 30 |
| 19 | I/O - 31 | 19 | I/O - 32 |
| 18 | I/O - 33 | 18 | I/O - 34 |
| 17 | I/O - 35 | 17 | I/O - 36 |
| 16 | I/O - 37 | 16 | I/O - 38 |
| 15 | I/O - 39 | 15 | I/O - 40 |
| 14 | I/O - 41 | 14 | I/O - 42 |
| 13 | I/O - 43 | 13 | I/O - 44 |
| 12 | I/O - 45 | 12 | I/O - 46 |
| 11 | I/O - 47 | 11 | I/O - 48 |
| 10 | I/O - 49 | 10 | I/O - 50 |
| 9 | I/O - 51 | 9 | I/O - 52 |
| 8 | I/O - 53 | 8 | I/O - 54 |
| 7 | I/O - 55 | 7 | I/O - 56 |
| 6 | I/O - 57 | 6 | I/O - 58 |
| 5 | I/O - 59 | 5 | I/O - 60 |
| 4 | I/O - 61 | 4 | I/O - 62 |
| 3 | I/O - 63 | 3 | I/O - 64 |
| 2 | GND | 2 | GND |
| 1 | GND | 1 | GND |

System Mating Connector:
 68-Pin 2-row 0.050" dual-ribbon cable
 socket connector: Robinson Nugent
 #P50E-068-S-TG, or equivalent.