

PXI-2200 Series

64-CH 12/16-Bit Up to 3 MS/s Multi-Function PXI Modules

Features

- PXI specifications Rev. 2.2 compliant
- 3U Eurocard form factor, CompactPCI compliant (PICMG 2.0 R3.0)
- 64-CH single-ended or 32-CH differential analog inputs
- Up to 3 MS/s sampling rate (PXI-2204)
- 12-bit A/D resolution (PXI-2204)
- 16-bit A/D resolution (PXI-2205 and PXI-2206)
- Onboard 1 k-sample A/D FIFO
- Bipolar or unipolar analog input ranges
- Programmable gains:
 - x1, x2, x4, x5, x8, x10, x20, x40, x50, x200 (PXI-2204)
 - x1, x2, x4, x8 (PXI-2205 and PXI-2206)
- 512-configuration channel-gain queue
- Scatter-gather DMA for both analog inputs and outputs
- 2-CH 12-bit multiplying analog outputs with waveform generation
- Onboard 1 k-sample D/A FIFO
- 24-CH TTL digital input/output
- 2-CH 16-bit general purpose timer/counter
- Analog and digital triggering
- Fully auto calibration
- Multiple modules synchronization through PXI trigger bus

Operating Systems


- Windows Vista/XP/2000/2003
- Linux

Recommended Software

- VB.NET/VC.NET/VB/VC++/
BCB/Delphi
- DAQBench

Driver Support

- DAQPilot for Windows
- DAQ-LVIEW PnP for LabVIEW™
- DAQ-MTLB for MATLAB®
- D2K-DASK for Windows
- D2K-DASK/X for Linux

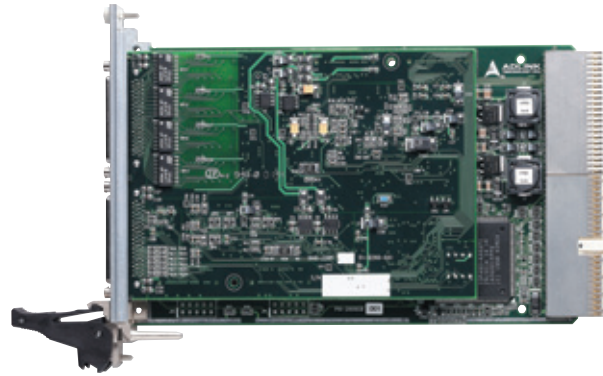

Introduction

ADLINK PXI-2204, PXI-2205, and PXI-2206 are high-density, high-performance multi-function PXI modules. These devices can sample up to 64 AI channels with various gain settings and scan sequences—making them ideal for high-density analog signals with various input ranges and sampling speeds. These devices also offer a differential mode for 32 AI channels to achieve maximum noise elimination.

The PXI-2200 series also features analog and digital triggering, 2-CH 12-bit analog outputs with waveform generation capabilities, 24-CH programmable digital I/O lines, and 2-CH 16-bit general-purpose timers/counters.

Like all the other members in the PXI-2000 family, the PXI-2200 series are able to perform analog input and output functions at full speed simultaneously. Multiple modules can also be synchronized through the PXI trigger bus. The auto-calibration feature adjusts the gain and offset to a specified accuracy, eliminating the need to calibrate the modules by adjusting trim pots.

Termination Boards

DIN-68S-01

Termination Board with a 68-pin SCSI-II Connector and DIN-Rail Mounting (Cables are not included. For information on mating cables, refer to Section 12.)



Termination Board DIN-68S-01
Mating Cable ACL-10568-1

Ordering Information

- **PXI-2204**
64-CH 12-Bit 3 MS/s Multi-Function PXI Module
- **PXI-2205**
64-CH 16-Bit 500 kS/s Multi-Function PXI Module
- **PXI-2206**
64-CH 16-Bit 250 kS/s Multi-Function PXI Module

Pin Assignment Connector CN1 Pin Assignment

A10 (AIH0)	1	35	(AIL0)	AI32
A11 (AIH1)	2	36	(AIL1)	AI33
A12 (AIH2)	3	37	(AIL2)	AI34
A13 (AIH3)	4	38	(AIL3)	AI35
A14 (AIH4)	5	39	(AIL4)	AI36
A15 (AIH5)	6	40	(AIL5)	AI37
A16 (AIH6)	7	41	(AIL6)	AI38
A17 (AIH7)	8	42	(AIL7)	AI39
A18 (AIH8)	9	43	(AIL8)	AI40
A19 (AIH9)	10	44	(AIL9)	AI41
A110 (AIH10)	11	45	(AIL10)	AI42
A111 (AIH11)	12	46	(AIL11)	AI43
A112 (AIH12)	13	47	(AIL12)	AI44
A113 (AIH13)	14	48	(AIL13)	AI45
A114 (AIH14)	15	49	(AIL14)	AI46
A115 (AIH15)	16	50	(AIL15)	AI47
AISENSE	17	51	AIGND	
A116 (AIH16)	18	52	(AIL16)	AI48
A117 (AIH17)	19	53	(AIL17)	AI49
A118 (AIH18)	20	54	(AIL18)	AI50
A119 (AIH19)	21	55	(AIL19)	AI51
A120 (AIH20)	22	56	(AIL20)	AI52
A121 (AIH21)	23	57	(AIL21)	AI53
A122 (AIH22)	24	58	(AIL22)	AI54
A123 (AIH23)	25	59	(AIL23)	AI55
A124 (AIH24)	26	60	(AIL24)	AI56
A125 (AIH25)	27	61	(AIL25)	AI57
A126 (AIH26)	28	62	(AIL26)	AI58
A127 (AIH27)	29	63	(AIL27)	AI59
A128 (AIH28)	30	64	(AIL28)	AI60
A129 (AIH29)	31	65	(AIL29)	AI61
A130 (AIH30)	32	66	(AIL30)	AI62
A131 (AIH31)	33	67	(AIL31)	AI63
EXTATRIG	34	68	AIGND	

Pin Assignment Connector CN2 Pin Assignment

DA0OUT	1	35	AOGND
DA1OUT	2	36	AOGND
AOEXTREF	3	37	AOGND
N/C	4	38	N/C
DGND	5	39	DGND
EXTWFTRIG	6	40	DGND
EXTDTRIG	7	41	DGND
SSHOUT	8	42	SDI0 / DGND*
RESERVED	9	43	SDI1 / DGND*
RESERVED	10	44	SDI2 / DGND*
AFI1	11	45	SDI3 / DGND*
AFI0	12	46	DGND
GPTC0_SRC	13	47	DGND
GPTC0_GATE	14	48	DGND
GPTC0_UPDOWN	15	49	DGND
GPTC0_OUT	16	50	DGND
GPTC1_SRC	17	51	DGND
GPTC1_GATE	18	52	DGND
GPTC1_UPDOWN	19	53	DGND
GPTC1_OUT	20	54	DGND
EXTTIMEBASE	21	55	DGND
PB7	22	56	PB6
PB5	23	57	PB4
PB3	24	58	PB2
PB1	25	59	PB0
PC7	26	60	PC6
PC5	27	61	PC4
DGND	28	62	DGND
PC3	29	63	PC2
PC1	30	64	PC0
PA7	31	65	PA6
PA5	32	66	PA4
PA3	33	67	PA2
PA1	34	68	PA0

*Pin 42-45 are SDI<0..3> for PXI-2204 ;
DGND for PXI-2205 and PXI-2206

Quick Selection Guide

Model number	Analog Input				Analog Output			DIO	Timer/Counter
	No. of channels	Resolution	Sampling rate	Input range	No. of channels	Resolution	Update rate	No. of channels	No. of channels
PXI-2204	32 DI/64 SE	12 bits	3 MS/s	±0.05 V to ±10 V	2	12 bits	1 MS/s	24-CH 8255 PIO	2-CH, 16-bit
PXI-2205	32 DI/64 SE	16 bits	500 kS/s	±1.25 V to ±10 V	2	12 bits	1 MS/s	24-CH 8255 PIO	2-CH, 16-bit
PXI-2206	32 DI/64 SE	16 bits	250 kS/s	±1.25 V to ±10 V	2	12 bits	1 MS/s	24-CH 8255 PIO	2-CH, 16-bit

Specifications

Model Number	PXI-2204	PXI-2205	PXI-2206
Analog Input			
Resolution	12 bits, no missing codes	16 bits, no missing codes	16 bits, no missing codes
Number of channels	64 single-ended or 32 differential (software selectable per channel)		
Channel gain queue size	512		
Maximum sampling rate	3 MS/s	500 kS/s	250 kS/s
Programmable gain	1, 2, 4, 5, 8, 10, 20, 40, 50, 200	1,2,4,8	1,2,4,8
Bipolar input ranges	±10 V, ±5 V, ±2.5 V, ±1.25 V, ±1 V, ±0.5 V, ±0.25 V, ±0.2 V, ±0.05 V	±10 V, ±5 V, ±2.5 V, ±1.25 V	±10 V, ±5 V, ±2.5 V, ±1.25 V
Unipolar input ranges	0-10 V, 0-5 V, 0-4 V, 0-2.5 V, 0-2 V, 0-1 V, 0-0.5 V, 0-0.4 V, 0-0.1 V	0-10 V, 0-5 V, 0-2.5 V, 0-1.25 V,	0-10 V, 0-5 V, 0-2.5 V, 0-1.25 V
Offset error	±2 mV	±1 mV	±1 mV
Gain error	±0.03% of FSR	±0.01% of FSR	±0.01% of FSR
Input coupling	DC		
Overvoltage protection	Power on: continuous ±30 V, Power off: continuous ±15 V		
Input impedance	1 GΩ/100 pF		
CMRR (gain = 1)	90 dB	83 dB	83 dB
Settling time	1 μs to 0.1% error *	2 μs to 0.1% error	4 μs to 0.01% error
-3 dB small signal bandwidth (gain = 1)	2 MHz	1.6 MHz	760 kHz
Trigger sources	Software, external digital/analog trigger, and PXI trigger bus		
Trigger modes	Pre-trigger, post-trigger, middle-trigger, delay-trigger, and repeated trigger		
FIFO buffer size	1 k samples		
Data transfers	Polling, scatter-gather DMA		
Analog Output			
Number of channels	2 voltage outputs		
Resolution	12 bits		
Output ranges	0-10 V, ±10 V, 0-AOEXTREF, ±AOEXTREF		
Maximum update rate	1 MS/s		
Slew rate	20 V/μs		
Settling time	3 μs to ±0.5 LSB accuracy		
Offset error	±1 mV		
Gain error	±0.02 % of max. output		
Driving capacity	±5 mA		
Stability	Any passive load, up to 1500 pF		
Trigger sources	Software, external digital/analog trigger, PXI trigger bus		
Trigger modes	Post-trigger, delay-trigger, and repeated trigger		
FIFO buffer size	1 k samples		
Data transfers	Programmed I/O, scatter-gather DMA		
Digital I/O			
Number of channels	24-CH 8255 programmable input/output		
Compatibility	5 V/TTL		
Data transfers	Programmed I/O		
General-Purpose Timer/Counter			
Number of channels	2		
Resolution	16 bits		
Compatibility	5 V/TTL		
Base clock available	40 MHz, external clock up to 10 MHz		
Auto Calibration			
Onboard reference	+5 V		
Temperature drift	±2 ppm/°C		
Stability	±6 ppm/1000 Hrs		
General Specifications			
Dimensions	160 mm x 100 mm (not including connectors)		
Connector	68-pin VHDCI female x 2		
Operating temperature	0 to 55°C		
Storage temperature	-20 to 70°C		
Humidity	5 to 95 %, non-condensing		
Power requirements	+5 V 1.3 A typical	+5 V 1.2 A typical	+5 V 1.2 A typical

*Gain = 1, 2, 4, 8

- 1 Software Solutions
- 2 PXI/CompactPCI Platforms
- 3 Modular Instrument
- 4 PXI/CompactPCI Modules
- 5 Bus Interface
- 6 GPIB Interface
- 7 PCI/PCI Express[®] DAQ Cards
- 8 PCI/PCI Express[®] DIO Cards
- 9 PC/104-Plus Modules
- 10 ISA DAS/DIO Cards
- 11 System Product
- 12 Wiring Termination Boards
- 13 Motion, HSL, Vision, COM & GEME
- 14 Remote I/O Modules
- 15 Industrial Computers