


BlueExpress BX-200

2U Industrial Chassis with 2-slot PCI-X™ and 2-slot PCI™ Backplane

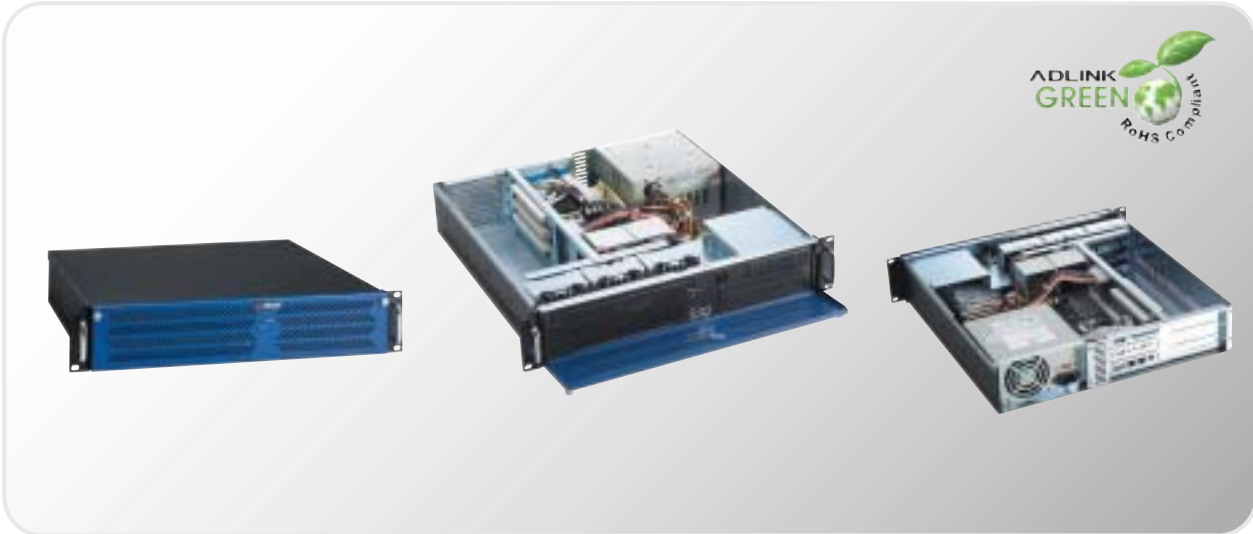

Features

- Short depth chassis for space savings
- Bay space for one 5.25" slim type CD-ROM and FDD, and one internal 3.5" drive bay
- Removable air filter

Ordering Information

Model Name	Chassis	Backplane	Power Supply
NS-200BX-D5S4C-460	BX-200 (BlueExpress)	HPX-D5S4C	APS-946XA-EPS12

Note: Additional options and customized configurations are available upon request.

Power Supply Options

Model Number	Watt	Input Range	Output (Max.)					Current Type	
			+5 V	+3.3 V	+12 V	-12 V	-5 V		+5 Vsb
APS-940XA-ATX12	400 W	90-264AC full Range	35 A	25 A	30 A	1 A	0.8 A	2 A	ATX12
APS-946XA-EPS12	460 W	90-264AC full Range	40 A	30 A	32 A	1 A	0.8 A	2 A	EPS12

Note: Contact us for more options such as DC input power supplies.

Backplane Options

	SHB*	PCI-X**	PCI**	Remarks
HPX-D5S4C	1	2 (100MHz)	2 (33MHz)	Default

* SHB: PICMG® 1.2 System Host Bus

** All PCI-X™ and PCI™ slots are 64-bit.

Specifications

Chassis

Dimensions	19 x 3.5 x 17.7 inch (483 x 88 x 450 mm) (W x H x D)
Drive Bays	One 5.25" bay space for slim type CD-ROM and internal 3.5" device, one external 3.5" drive bay
Constructions	Heavy-Duty Steel
Color Option	Black: standard Others: call for availability
Cooling Fans	Three 8 cm ball bearing fans, 42.5 CFM each
Front Panel	Easy to customized front door LEDs: Disk active, system power System reset switch, ATX Power switch Two USB 1.1/2.0 connectors, PS/2 keyboard connector
Rear Panel	Six I/O slots available
Carton Size	24.2 x 8.8 x 23.6 inch (615 x 224 x 600 mm)
Weight	15 kgs/33 lbs

Dimensions

