


# cPCI-3920 Series

3U CompactPCI® Intel® Core™2 Duo Processor Blade with 3100 Chipset

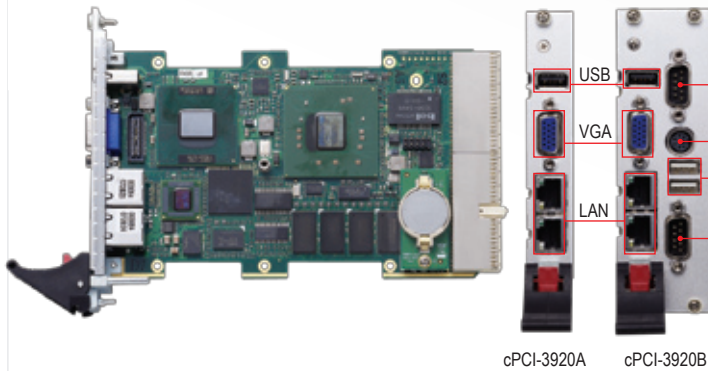

## Features

- Low power Intel® Core™2 Duo and Core™ Duo processor
- Server class Intel® 3100 chipset
- DDR2-400 registered ECC soldered SDRAM
- Two PCI-Express® Gigabit Ethernet
- Supports USB 1.1/2.0 flash module and Serial ATA storage
- Three USB 2.0 and three serial ports



## Specifications

### Processor & System

CPU	<ul style="list-style-type: none"> <li>μFC-BGA Intel® Core™2 Duo LV (L7400) 1.5 GHz, 667 MHz FSB, 4 MB L2 cache</li> <li>μFC-BGA Intel® Core™ Duo ULV (U2500) 1.2 GHz, 533 MHz FSB, 2 MB L2 cache</li> <li>μFC-BGA Intel® Celeron® M Proc ULV (423) 1.07 GHz, 533 MHz FSB, 1 MB L2 cache</li> </ul>
Chipset	Intel® 3100 (Memory Controller Hub + I/O Controller Hub)
RAM	Single-Channel DDR2-400 Registered ECC Soldered 1 GB, up to 2 GB
BIOS	AMIBIOS® 8 16 Mbit FWH Flash Memory
CompactPCI Bus	32-bit/33 MHz CompactPCI® Bus, universal V(I/O)
PICMG standard	PICMG® 2.0 CompactPCI® R3.0 PICMG® 2.1 Hot Swap R2.0

### Connectivity

Ethernet	Intel® PCI-Express® 82571EB dual port Ethernet controller Two front egress ports, switchable to RTM
Graphics	XGI Z11 PCI-E® x1 Graphics Controller 64-bit 2D Accelerator Up to 1600 x 1200 at 70 Hz 16 M colors
USB	Up to three front panel USB ports Two USB ports on RTM 9-pin header for horizontal USB NAND flash drive
PS/2	One PS/2 KB/MS Combo Port
Serial Port	Two DB-9 front panel ports, one is for RS-232, and the other one is selectable RS-232/422/485/485+ port Two TTL level RS-232 ports on RTM, one DB-9 connector on front panel, one 10-pin header onboard

### Storage

SBG	Optional USB NAND flash drive, up to 8GB
	SATA port for 2.5" HDD direct mounting (8HP version only)
RTM	3x 7-pin SATA connectors for external HDD

### Operating System

OS	Microsoft® Windows® XP Microsoft® Windows® Server 2003 Microsoft® Windows® Vista Enterprise, 32-bit Fedora™ 8
----	--

### Miscellaneous

LED	Three LEDs: Power, WDT, CPU over temperature
Battery	Adapter designed coin cell lithium battery for RTC CMOS RAM
Hardware Monitor	Integrated in W83792AG, monitors CPU temperature, Vcore and DC voltages
Watchdog Timer	Integrated in Intel® 3100, two stage, system reset and NMI, with programmable interval, 1 ms to 1050 sec.

### Mechanical & Environmental

Form Factor	3U 4HP/8HP CompactPCI® 100mm x 160mm (LxW)												
Operating Temp.	0°C to +60°C with external air flow -20°C to +70°C extended temperature (optional)												
Storage Temp.	-40°C to +85°C												
Rel. Humidity	5% to 95% non-condensing												
Shock	20G peak-to-peak, half-sine, 11ms duration, operating												
Vibration	2 Grms, 5-500 Hz, each axis in operating												
Power Consumption	Core™2 Duo 1.5GHz (L7400), 1GB DDR2-400 soldered, under Windows® XP with 100% CPU loading												
	<table border="1"> <thead> <tr> <th></th> <th>Current(A)</th> <th>Power(W)</th> </tr> </thead> <tbody> <tr> <td>3.3V</td> <td>1.61</td> <td>5.31</td> </tr> <tr> <td>5V</td> <td>6.02</td> <td>30.10</td> </tr> <tr> <td>Total</td> <td></td> <td>35.41</td> </tr> </tbody> </table>		Current(A)	Power(W)	3.3V	1.61	5.31	5V	6.02	30.10	Total		35.41
	Current(A)	Power(W)											
3.3V	1.61	5.31											
5V	6.02	30.10											
Total		35.41											

### Safety & EMI

Certifications	CE, FCC Class A
----------------	-----------------

## I/O Table

		GbE	USB	VGA	COM 3/4	COM 1	COM 2	SATA	PS/2 KB/MS	LED	Reset Button
<b>SBC</b>											
cPCI-3920A	Face-plate	2*	1	1						3	1
	On-board		1 (9-pin)								
cPCI-3920B	Face-plate	2*	3	1	1 (DB-9)				1	3	1
	On-board		1 (9-pin)					1			
<b>RTM</b>											
cPCI-R3920 (T)	Face-plate	2*	2			1 (DB-9)					
	On-board						1 (10-pin)	3			

Note\* : Switchable to front or rear by software selection.

## Ordering Information

Model Number	Description/Configuration
<b>CPU Board</b>	
cPCI-3920A/C2D15/M1G	Single-slot 3U CompactPCI® Core™2 Duo LV 1.5 GHz SBC with 512 MB soldered REG/ECC DDR2 SDRAM
cPCI-3920A/CM10/M1G	Single-slot 3U CompactPCI® Celeron® M LV 1.0 GHz SBC with 1 GB soldered REG/ECC DDR2 SDRAM
cPCI-3920B/C2D15/M1G	Dual-slot 3U CompactPCI® Core™2 Duo LV 1.5 GHz SBC with 1 GB soldered REG/ECC DDR2 SDRAM
cPCI-3920B/CD12/M1G	Dual-slot 3U CompactPCI® Core™ Duo 1.2 GHz SBC with 1 GB soldered REG/ECC DDR2 SDRAM
cPCI-3920B/CM10/M1G	Dual-slot 3U CompactPCI® Celeron® M LV 1.0 GHz SBC with 1 GB soldered REG/ECC DDR2 SDRAM
cPCI-3920B/C2D15/M2G	Dual-slot 3U CompactPCI® Core™2 Duo LV 1.5 GHz SBC with 2 GB soldered REG/ECC DDR2 SDRAM
cPCI-3920B/CD12/M2G	Dual-slot 3U CompactPCI® Core™ Duo 1.2 GHz SBC with 2 GB soldered REG/ECC DDR2 SDRAM
<b>Rear Transition Module</b>	
cPCI-R3920	Rear Transition Module for cPCI-3920, 50 mm depth
cPCI-R3920T	Rear Transition Module for cPCI-3920, 80 mm depth

Contact us for more CPU, memory & HDD options.

