

# Mini PCI Cards

# Audio Cards

## mPCI-8219

### Single Channel Ultra160 SCSI mPCI Card

- SCSI Processor: LSI 53C1000R
- Form Factor: ADLINK mPCI standard
- Bus: 32-bit/33 MHz PCI with MiniPCI
- SCSI BIOS: Onboard
- SCSI Connector: 68-Pin LVD
- Built-in Menu-Configuration Utility in Boot-ROM
- Automatically enables LVD or SE termination
- Driver support for DOS, Windows® 95/98/NT/2000/XP, Linux®, Solaris



## mPCI-8750C

### VGA Display mPCI Card

- PCI VGA Controller ATI RageXL, with built-in 8 MB VRAM
- VGA display via DB-15 connector
- High performance, 128-bit, single clock cycle 2D drawing engine
- High performance, power managed 3D acceleration engine
- Supports up to 1600 x 1200 VGA resolution 32-bit true color, non-interlaced
- Driver support: Windows® 95/98/ME/NT/2000/XP, Linux®



## mPCI-8220D

### Dual Intel® 82559 10/100Mbps Ethernet mPCI Cards


- Onboard dual Intel® 82559 IEEE 802.3 10/100-BaseTX Ethernet controllers
- Supports IEEE 802.3u auto-negotiation for 10 Base-T/100Base-TX
- Supports IEEE 802.3x 100Base-TX flow control
- External RJ-45 connectors
- Reserved extra pin-header for LAN status LED for panel-free design



## DB-Audio2

### High Definition Audio Daughter Board with Line-in, Line-out and Mic-in

- Realtek ALC262 high definition audio codec
- Three phone jacks: line-in, line-out and mic-in
- 5 x 2 headers for cable connection to external audio header
- 4-pin header interface with audio output of CD drive

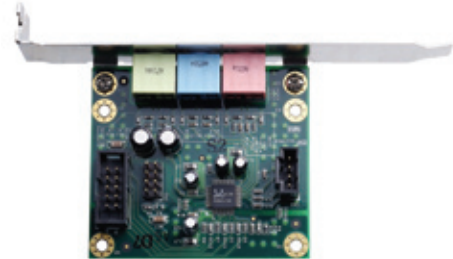

## DB-AC97S

### AC'97 Audio Daughter Board with Line-in, Line-out and Mic-in

- Realtek ALC200 AC'97 audio codec
- AC'97 interface with 10-pin header and flat cable
- Three phone jacks: line-in, line-out and mic-in
- 4-pin header interface with audio output of CD drive

