

# SETO-1000

## Extreme Outdoor Server with Intel® Xeon® Processor E5-2400 v2 Series

### Features

- Single/Dual Intel® Xeon® Processor E5-2400 v2 series
- Six memory sockets support VLP RDIMM DDR3-1333/1600 REG/ECC up to 96GB
- Intel® C604 Chipset
- Dual 10G SFP+ ports
- Dual 10/100/1000 BASE-T ports
- IP65 water and dust proof
- Conduction cooled, aluminum chassis



### Specifications

#### CPU / Chipset / Memory

CPU	Single/Dual Intel® Xeon® E5-2418L v2 (6C/12T) 2.0GHz Single/Dual Intel® Xeon® E5-2428L v2 (8C/16T) 1.8GHz Single/Dual Intel® Xeon® E5-2448L v2 (10C/20T) 1.8GHz
Chipset	Intel® C604 Chipset
Memory	Six DDR3-1600/1866 240-pin VLP RDIMM sockets, up to 96 GB (up to 48GB for single CPU SKUs)

#### BIOS

Chip	AMI BIOS on SPI flash memory
------	------------------------------

#### I/O Interfaces

Ethernet	Dual 10/100/1000BASE-T RJ-45 port Dual 10G SFP+ interface
Storage	Onboard bootable 32GB SATA flash (optional up to 256GB) Two 2.5" SATA SSD drive bays (external access)
USB	Two USB 2.0 ports on front panel
Front Panel I/O	2x 1GbE port 2x SFP+ port 1x Display port (Break cable for 2 USB port and console port)
Power Input	DC 36-72V power input, supports DC-48V for Telcom

#### IPMI

Chip	Smart Fusion A2F500
IPMI	IPMI v2.0 based intelligent system manager & power manager. Supports temperature management for platform power manager: cold start heating, overheating, lower performance, shutdown & auto recover, self & remote diagnostic capability

#### Other Features

Expansion	Mini PCIe socket onboard; PCIe x16 signals via proprietary onboard connector (max. 15W)
Packet Processing Acceleration	Intel® Communications Chipset 8920 (optional)
Operating System	Linux 6.x

#### Mechanical and Environmental

Form Factor	Fanless with aluminum conduction cooling enclosure
Dimension	340 mm x 440 mm x 44 mm (L x W x H)
Weight	10 kg
Operating Temp.	-40°C to +55°C (Airflow: +25°C 8 CFM/+55°C 30 CFM)
Storage Temp.	-40°C to +70°C
Humidity	5% to 95%, non-condensed
Shock	20G peak-to-peak, 11ms duration, non-operation
Vibration	Non-operation: 1.88Grms, 5-500Hz each axis Operation: 0.5Grms, 5-500Hz each axis
Power Consumption	400~500W
IP rating	IP65
Certification	FCC, CE, UL, NEBS Level 3 (design)



Specifications	SETO-1000	SETO-1010
Hot-swappable drive bay	•	
Internal driver bay		•
1GbE port	2	3
LAN bypass		•
SFP+	2	
10GbE Fiber bypass		2
VGA output		•

### Ordering Information

#### Modules

Model Number	Description/Configuration
93-99202-001E	SETO-1000/D2418Lv2/M16GB/mSATA32GB
93-99202-100E	SETO-1000/D2428Lv2/M16GB/mSATA32GB
93-99202-200E	SETO-1000/D2448Lv2/M16GB/mSATA32GB

# Mechanical Layout

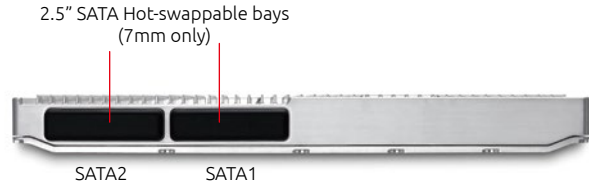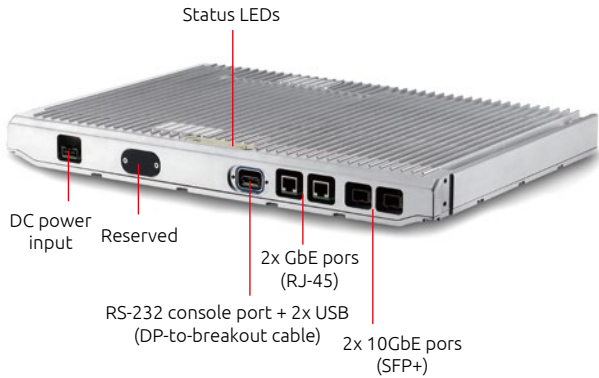

# Functional Diagram

