
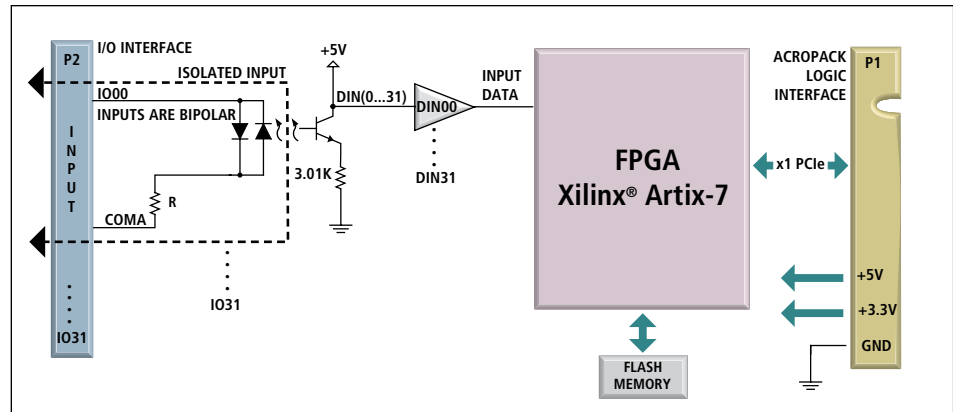


# AcroPack™ Modules

## AP440 Isolated Digital Input with Interrupts

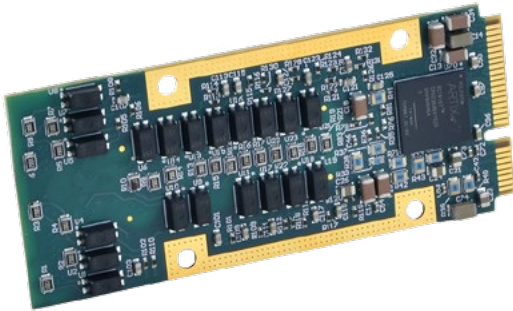

32 Isolated Digital Input Channels ♦ Extended Temperature ♦ PCIe Bus Interface

### Description

#### Models

**AP440-1E-LF:** ±4 to ±18V DC or AC peak input

**AP440-2E-LF:** ±16 to ±40V or AC peak input

**AP440-3E-LF:** ±38 to ±60 or AC peak input

The AcroPack™ product line updates our popular Industry Pack I/O modules with a PCIe interface format. This tech-refresh design offers a compact size, low-cost I/O, the same functionality and memory map of the existing IP modules and a rugged form factor.

AP440-XE-LF modules provide 32 optically isolated inputs to safely monitor a wide range of digital input voltage levels.

Isolation protects your computer system from noise, transient signals, and field wiring faults. The inputs are grouped into four 8-channel ports. Ports are isolated from the logic and each other.

Change-of-state interrupts are supported using paired channels. Debounce eliminates spurious interrupts from noise and switching transients for error-free edge detection

Closed-loop monitoring of critical control signals is easily accomplished using the AP440-XE-LF in conjunction with Acromag's AP445E-LF digital output module.

The AP440 series modules are 70mm long, this is 19.05mm longer than the full length mini PCIe card at 50.95mm. The boards width is the same as mPCIe board of 30mm and they use the same mPCIe standard board hold down standoff and screw keep out areas. A down facing 100 pin Samtec connector will mate with the carrier card. Fifty of these signals are available as field I/O signals. Pin spacing and signal assignments will allow for 100V of port to port isolation. Logic and field lines are isolated from each other for voltages up to 250V AC or DC on a continuous basis. The AP440 series maintains the same functionality and memory map of the existing Industry Pack modules providing a smooth transition to the AcroPack I/O modules.

### Key Features & Benefits

- PCI Express Generation 1 interface
- 2.5 Gbps bus speed with one lane in each direction
- 32 port-isolated input channels
- Interrupt support for each channel
- Programmable polarity of event interrupts (low-to-high or high-to-low transitions)
- Programmable debounce
- Input hysteresis
- Reverse polarity protection
- Software configuration (no jumpers or switches)
- Software configuration allows "on-the-fly" changes without removing modules.
- Pins are compatible with AP445E-LF output module for loopback monitoring
- Loopback monitoring enables self-test and fault diagnostics to detect open switches or shorts.
- Extended temperature range



Tel 248-295-0310 ■ Fax 248-624-9234 ■ solutions@acromag.com ■ www.acromag.com ■ 30765 Wixom Rd, Wixom, MI 48393 USA

# AcroPack Modules

## AP440 Isolated Digital Input

### Performance Specifications

#### Digital Inputs

Input channel configuration  
32 optically isolated inputs

#### Isolation

Logic and field connections are optically isolated. Individual ports are also isolated from each other. Input lines of individual ports share a common connection and are not isolated from each other. Logic and field lines are isolated from each other for voltages up to 250V AC rms 250V DC on a continuous basis (unit will withstand a 1250V AC dielectric strength test for one minute without breakdown).

#### Bipolar input voltage range

AP440-1E-LF:  $\pm 4$  to  $\pm 18$ V DC or AC peak  
AP440-2E-LF:  $\pm 16$  to  $\pm 40$ V DC or AC peak  
AP440-3E-LF:  $\pm 38$  to  $\pm 60$ V DC or AC peak

#### Input low-to-high threshold

AP440-1E-LF:  $\pm 4$ V maximum  
AP440-2E-LF:  $\pm 16$ V maximum  
AP440-3E-LF:  $\pm 38$ V maximum

#### Input response time

On to off: 15 $\mu$ S typical  
Off to on: 35 $\mu$ S typical

#### Interrupts: 32 channels configurable as below

High-to-low transitions  
Low-to-high transitions  
Change-of-state (two inputs required)

#### Debounce

Selectable for 4 $\mu$ S, 64 $\mu$ S, 1mS, or 8mS

#### PCI Express Base Specification

Conforms to revision 2.1

#### Lanes

1 lane in each direction

#### Bus Speed

2.5 Gbps (Generation 1)

#### Memory

4k space required  
1 base address register

#### Environmental

##### Operating temperature

-40 to 85°C  
*a conduction cooled application with an AcroPack requires heatsink model AP-CC-0*

##### Storage temperature

-55 to 150°C

##### Relative humidity

5 to 95% non-condensing

##### MTBF

Contact the factory

##### Power

+1.5 VDC ( $\pm 5\%$ ) not used  
+3.3 VDC ( $\pm 5\%$ ) 1.8 A Typical, 2.1 A maximum  
+5 VDC ( $\pm 5\%$ ) 15 A Typical, 0.2 A maximum  
+12 VDC ( $\pm 5\%$ ) not used  
-12 VDC ( $\pm 5\%$ ) not used

#### Physical

##### Length

70mm

##### Width

30mm

### Ordering Information

#### AcroPack™ Modules

##### [AP440-1E-LF](#)

Digital input,  $\pm 4$  to  $\pm 18$ V

##### [AP440-2E-LF](#)

Digital input,  $\pm 16$  to  $\pm 40$ V input range

##### [AP440-3E-LF](#)

Digital input,  $\pm 38$  to  $\pm 60$ V input range

*(Note: Acropack modules are compatible only with the carriers listed below)*

#### Accessories

##### AP-CC-01

Conduction-cool kit

#### Carrier Cards

##### [APCe7020E-LF](#)

PCIe AcroPack carrier, holds 2 AP boards

##### VPX4500E-LF

3U VPX AcroPack carrier, holds 3 AP boards

#### Software *(see software documentation for details)*

##### APSW-API-VXW

VxWorks® software support package

##### APSW-API-WIN

Windows® DLL driver software support package

##### APSW-API-LNX

Linux™ support (website download only)

ISO9001  
AS9100   
MADE IN USA

 THE LEADER IN INDUSTRIAL I/O

Tel 248-295-0310 ■ Fax 248-624-9234 ■ [solutions@acromag.com](mailto:solutions@acromag.com) ■ [www.acromag.com](http://www.acromag.com) ■ 30765 Wixom Rd, Wixom, MI 48393