
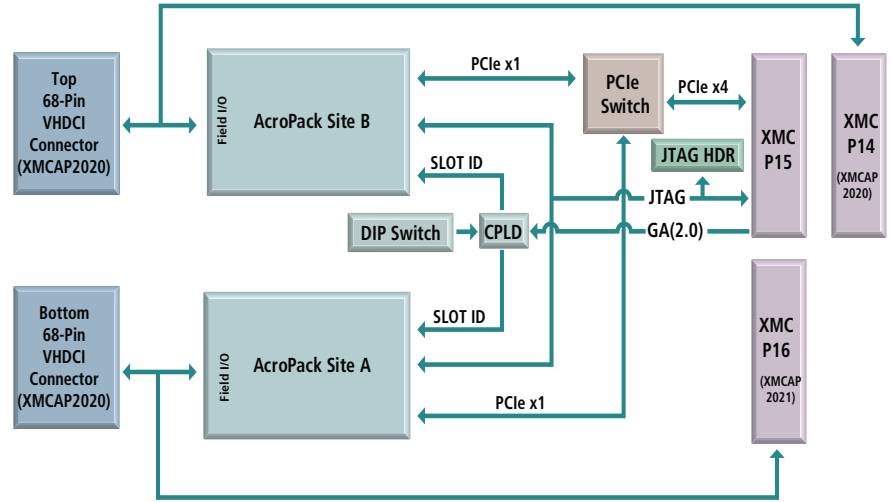


AcroPack® Module Carriers

PRELIMINARY
20170307
DATA
SUBJECT
TO
CHANGE
INFORMATION

XMCAP2000 Series XMC Carrier Cards for AcroPack® Modules

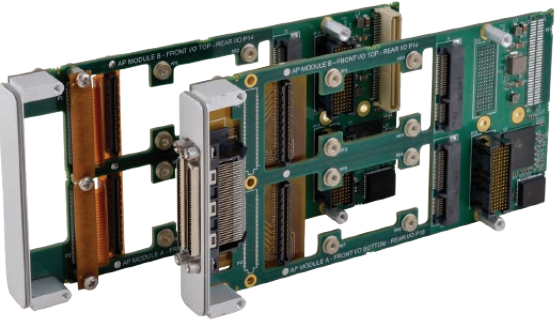

Two AcroPack or mini-PCIe mezzanine module slots ♦ Non-Intelligent carrier card ♦ PCIe x4 interface

Description

Models:

XMCAP2020-LF: Front I/O

XMCAP2021-LF: Rear I/O

The AcroPack® product line updates our popular Industry Pack I/O modules with a PCIe interface format. This tech-refresh design offers a compact size, low-cost I/O, the same functionality and memory map of the existing Industry Pack modules.



This board interfaces two AcroPack mezzanine modules to a PCI Express bus on an air-cooled XMC carrier.

Two AcroPack module slots give you the freedom to mix a variety of I/O functions (A/D, D/A, digital in, digital out, serial I/O, etc.) on a single board. Or, combine modules of the same type for almost one hundred channels on a single card. Either way, the XMCAP2020/2021 saves your precious card slots and reduces your costs.

Select I/O modules from Acromag's offering or use most third-party mPCIe compliant modules.

Key Features & Benefits

- Two AcroPack or mini-PCIe module slots support any combination of I/O functions
- PCI Express compliant
- Plug-and-play carrier configuration and interrupt support
- Front panel 68-pin CHAMP 0.8mm connectors for field I/O
- Rear P14 and P16 connectors for field I/O
- DIP switch and/or geographical addressing for card identification
- VITA 42.0, 42.3 compliant
- JTAG programming through XMC P15 connector or through onboard micro connector
- Software development tools for VxWorks, Linux, and Windows environments

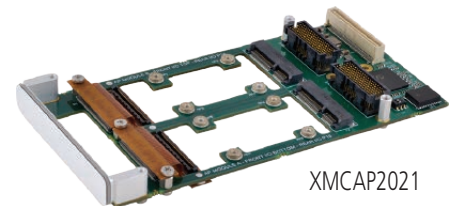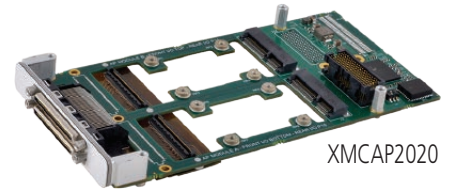

Tel 248-295-0310 ■ Fax 248-624-9234 ■ solutions@acromag.com ■ www.acromag.com ■ 30765 Wixom Rd, Wixom, MI 48393 USA

AcroPack® Module Carriers

XMCAP2000 Series XMC Carrier Cards for AcroPack® Modules

Performance Specifications

■ PCI Express Bus Compliance

This device meets or exceeds all written PCI Express specifications per revision 2.1.

Includes a PCIe Gen 2 switch to expand the single host PCIe port to two ports, one to each device (AcroPack or mini-PCIe).

The host port consists of four PCIe lanes, each of the mini-PCIe sites have one lane each.

■ Field I/O Connectors

Front I/O

XMCAP2020-LF: Two 68-pin 0.8mm Champ cable connection. Pin assignments are defined by the installed AcroPack or mini-PCIe module.

Rear I/O

XMCAP2021-LF: One AcroPack routed to rear P14 connector and one AcroPack routed to rear P16 connection.

■ Ease of Use

A unique carrier and site number can be set for each AcroPack site by a DIP switch or geographical addressing. This provides the capability to distinguish a particular AcroPack module from others when multiple instances of the same module are used in a system.

JTAG signal are provided for programming and debugging the FPGA on some AcroPack modules. The JTAG ports of the two AcroPack modules are daisy-chained.

■ Physical

Physical Configuration

PCIe x4 lane

Length: 5.866 inches (149 mm)

Height: 2.9134 inches (74 mm)

Conforms to VITA 42 air-cooled XMC specification.

■ Environmental

Operating temperature

-40 to +70°C

Storage temperature

-55 to +125°C.

Relative humidity

5 to 95% non-condensing.

Power

+3.3 Volts (±5%): 140mA typical

VPWR: +5 Volts (± 5%): 200mA typical

VPWR: +12 Volts (± 8%): <100 mA typical

The XMCAP2010/2020 has four DC/DC converters to provide the power supply voltages to the AcroPack modules that are not present at the host interface.

The +1.5 Volt supply is sourced from the VPWR host power. The +5 Volt and +12 Volt supplies are sourced from +3.3 Volt host power.

Ordering Information

Carrier Card

[XMCAP2020-LF](#)

AcroPack carrier card for AcroPack or mPCIe modules, front I/O, air-cooled, two AcroPack slots

[XMCAP2021-LF](#)

AcroPack carrier card for AcroPack or mPCIe modules, front I/O, air-cooled, two AcroPack slots

Accessories

[5028-420](#)

Round cable, shielded, SCSI-3 to CHAMP. 0.8mm, 2 meters long.

[5025-288](#)

Termination panel, SCSI-3 connector, 68 screw terminals

AcroPack® Modules

See www.Acromag.com/AcroPacks for more information.

Software Development Tools

[APSW-API-VXW](#)


VxWorks® software support package

[APSW-API-WIN](#)

Windows® DLL driver software support package

[APSW-API-LNX](#)

Linux® support (website download only)

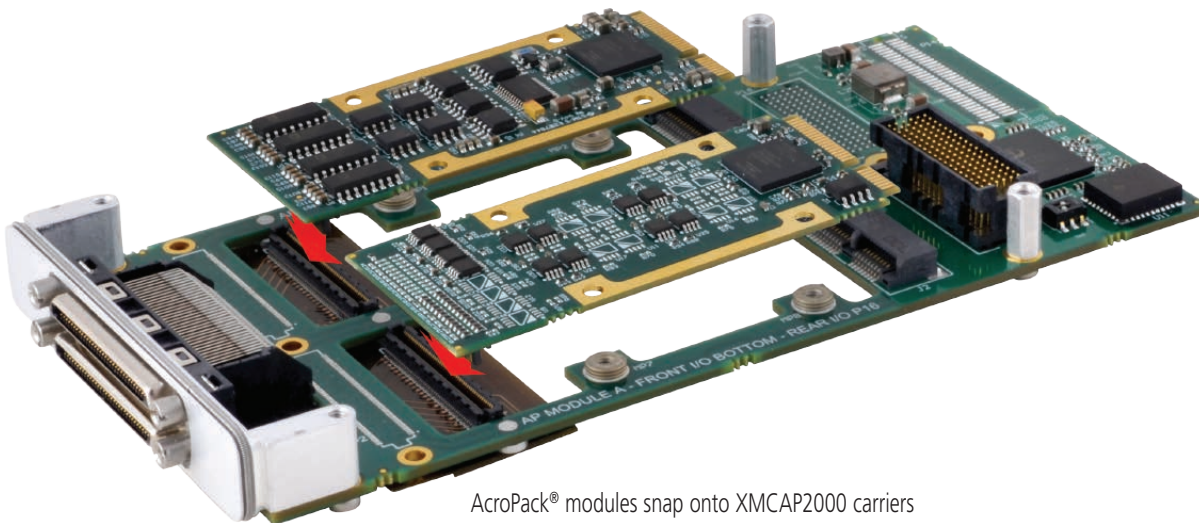

AcroPack® modules snap onto XMCAP2000 carriers eliminating messy ribbon connectors.

ISO9001
AS9100  MADE IN USA

 THE LEADER IN INDUSTRIAL I/O

Tel 248-295-0310 ■ Fax 248-624-9234 ■ solutions@acromag.com ■ www.acromag.com ■ 30765 Wixom Rd, Wixom, MI 48393 USA