

ATCA-7360

AdvancedTCA Processor Blade

■ Embedded Computing for Business-Critical Continuity™

PRELIMINARY DATA SHEET


The ATCA-7360 processor blade is an ideal solution for communications equipment requiring powerful server class processing performance, flexible mass storage and network options

- High performance Intel® Architecture processor blade
- Two, quad-core Intel® Xeon® L5518 (2.13 GHz) processors
- Up to 80GB main memory
- Hot-swappable hard disk with flexible choice of storage options
- RAID 0/1 support for external disk drives
- Multiple network and storage I/O connectivity
- Option 9 (1/10GbE) ATCA fabric interface
- Designed for NEBS and ETSI compliance
- Multiple software packages including operating systems

The Emerson Network Power ATCA-7360 is an Intel® Architecture server blade that delivers a combination of performance and flexibility to help drive the successful implementation of next-generation telecom networks and communication infrastructures. It builds on the AdvancedTCA® (ATCA®) standard to provide the right product at the right time to meet the needs of communication industries.

With two quad-core Intel® Xeon® L5518 processors, the ATCA-7360 processor blade enables best-in-class compute performance in an ATCA form factor. The PICMG® 3.1 compliant fabric interface provides 10 Gigabit Ethernet (10Gbps) capability for applications requiring higher network throughput in the backplane.


Multiple network and storage I/O interfaces allow the integration into different network infrastructures such as telecommunication central offices and network data centers. Main memory configuration and mass storage options can be flexibly configured providing a perfect fit to the applications needs. RAID 0 and 1 can be enabled when connecting to external disks.

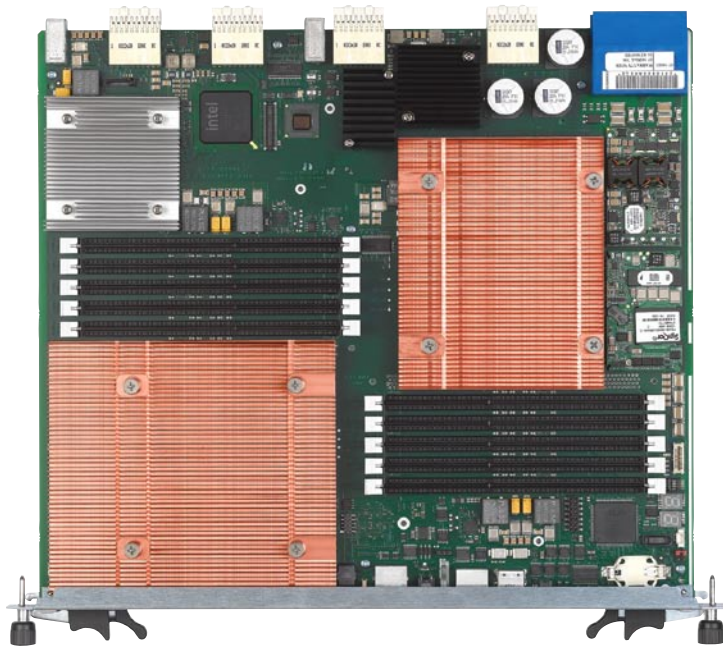

AdvancedTCA®


EMERSON™
Network Power

ATCA-7360 Block Diagram

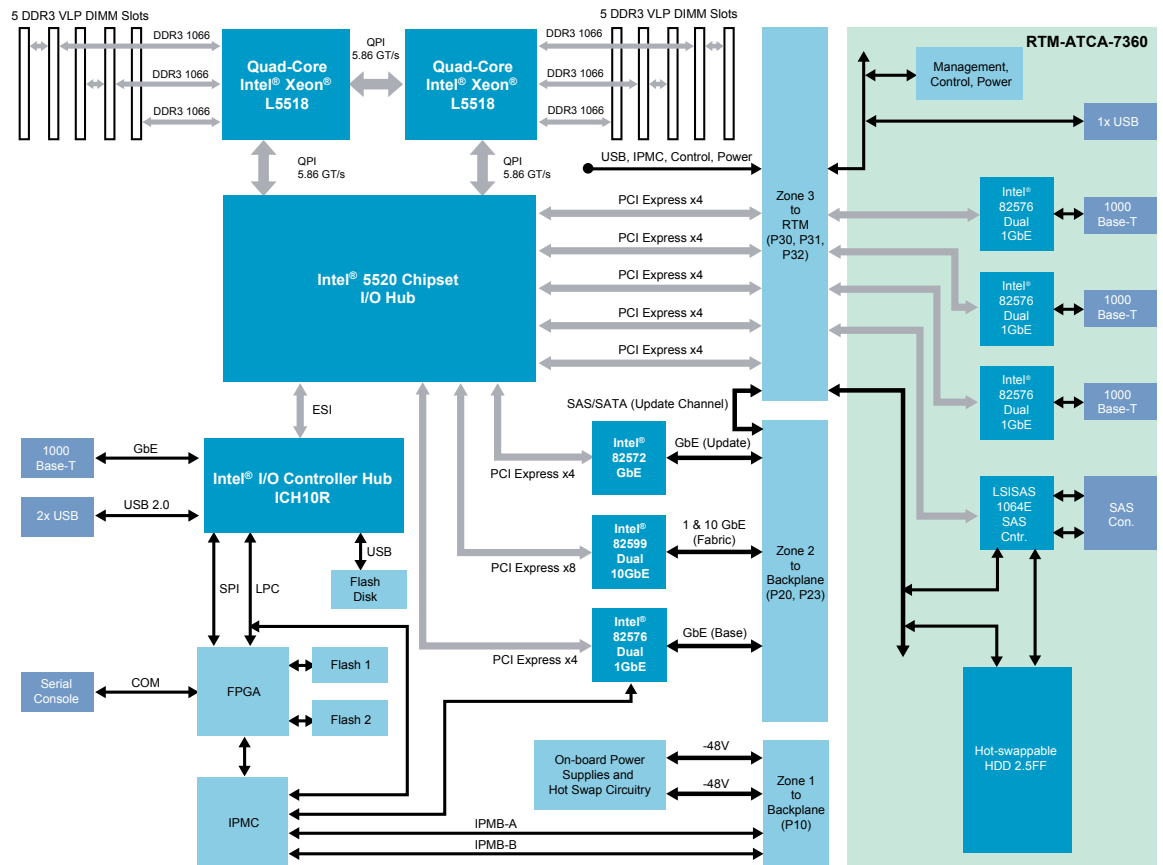

Standard Networking Support

The ATCA-7360 processor blade provides PICMG 3.0 base interface connectivity in a dual star configuration using standard Gigabit Ethernet (GbE) technology. The PICMG 3.1 fabric interface features both dual 10Gbps (option 9) and dual 1Gbps (option 1) Ethernet capability. A further 1Gbps Ethernet backplane connection is available on the ATCA update channel. External network connectivity includes 10/100/1000Base-T Ethernet via RJ-45 connector on the blade faceplate. Several rear transition module (RTM) configurations support up to six additional 10/100/1000Base-T connections.

Processor Complex

Both Intel® Xeon® L5518 processors are connected together via QPI busses to share memory resources. The processors can access the entire I/O subsystem via the Intel® 5520 chipset I/O hub. The I/O subsystem consists of:

- Intel® I/O Controller Hub ICH10R
- Intel® 82572 Gigabit Ethernet controller
- Intel® 82576 dual Gigabit Ethernet controllers
- Intel® 82599 dual 10 Gigabit Ethernet controller
- LSI Logic LSISAS1064E SAS controller
- Emulex 4Gbps Fibre Channel controller

Software Support

The ATCA-7360 blade can be configured with a variety of software offerings, from firmware-only to fully integrated and verified software operating environments.

FIRMWARE

Firmware-only blade-level support is offered for customers taking on the integration and verification responsibilities. It provides all the boot and IPMC firmware required for an ATCA blade.

The BIOS firmware includes support for:

- Unified Extensible Firmware Interface (UEFI)
- Power management support, ACPI 3.0
- Multiple boot options including:
 - ▲ Local and external hard disks
 - ▲ On-board flash disk
 - ▲ External USB boot media
 - ▲ PXE boot via ATCA base interface
 - ▲ iSCSI boot via ATCA base interface
- RAID 0/1 support via LSI SAS BIOS extension
- Serial redirection of the BIOS console
- Serial over LAN of the BIOS console via ATCA base interface
- BIOS upgrade via local host

INTELLIGENT PLATFORM MANAGEMENT CONTROL

The ATCA-7360 features an intelligent platform management controller (IPMC). The IPMC is a management subsystem providing monitoring, event logging, and recovery control. The IPMC serves as the gateway for management applications to access the platform hardware. Features include:

- Compliance with PICMG 3.0 and IPMI 1.5
- Rollback capability if BIOS or IPMC image upgrade failed
- Firmware (BIOS, IPMC, FPGA, FRU) upgradable from IPMI interface (IPMB) and locally, PICMG HPM.1 support
- Support for serial port redirection over LAN interface (IPMI 2.0 compliant)

SUPPORTED OPERATING SYSTEMS

- Red Hat RHEL 5.4 certified
- Wind River PNE LE 3.0
- Prepared for Microsoft® Windows® Server 2008

To better exploit the CPU and I/O resources of the blade, RHEL 5.4 supports CPU and I/O virtualization using XEN/KVM. In addition RHEL 5.4 provides code for enabling the processor power management to help enhancing energy efficiency of the blade.

Emerson ATCA blades can be configured with optional software that includes Basic Blade Services. When integrated in one of the Emerson ATCA Centellis™ platforms, the ATCA-7360 comes complete with, and is verified with, Wind River PNE 3.0. This distribution comes with all Linux Support Packages (LSPs) to support Emerson ATCA blades as well as user applications. Basic Blades Services (BBS) software is provided to enable a set of ATCA hardware and software components into a fully integrated and verified telecom platform – the Centellis platform. This platform is ready for customers HA middleware and application environment.

Basic Blade Services include:

- Hardware Platform Management including local IPMC, LED, E-Keying and blade extraction software
- Firmware upgrade utility
- Local management access (CLI)

RELEVANT STANDARDS

- Linux Foundation
- Service Availability Forum™ (SA Forum)
 - ▲ Hardware Platform Interface (HPI) – HPI-B.02

Please check with your local sales contact for availability of supported Centellis™ platforms.

Rear Transition Modules

Several RTM variants are available to support different I/O configurations at the RTM faceplate.

RTM-ATCA-7360 includes:

- One (1) USB 2.0 interface
- Six (6) Gigabit Ethernet interfaces, 10/100/1000Base-T, RJ-45 connector
- Two (2) SAS interfaces, SFF-8470 connector
- Disk bay for one (1) hot-swappable hard disk, 2.5"

RTM-ATCA-7360L includes:

- One (1) USB 2.0 interface
- Two (2) Gigabit Ethernet interfaces, 10/100/1000Base-T, RJ-45 connector
- Two (2) SAS interfaces, SFF-8470 connector
- Disk bay for one (1) hot-swappable hard disk, 2.5"

RTM-ATCA-7360FC supports:

- One (1) USB 2.0 interface
- Six (6) Gigabit Ethernet interfaces, 10/100/1000Base-T, RJ-45 connector
- Two (2) SAS interfaces, SFF-8470 connector
- Two (2) Fibre Channel interfaces, up to 4Gbps, prepared for SFP modules

Hardware

PROCESSOR

- Two quad-core Intel® Xeon® L5518 (2.13 GHz) processors
- QuickPath Interface (QPI) – 5.86 GT/s
- 8MB L3 cache (per processor)
- 64-bit mode extension (EM64T)
- SMP support

MEMORY

- DDR3-1066 memory controllers integrated into processors
- Total of six independent memory channels
- From 2 to 80GB memory configurations supported
- 4MB primary firmware flash, 4MB redundant flash for failsafe operation
- Reset persistent SRAM and flash memory, optional

MASS STORAGE

- Embedded USB flash disk, 4GB (up to 32GB possible)
- Hot-swappable hard disk on RTM
- Hard disk drive options including
 - ▲ Enterprise class disks (various capacity options)
 - ▲ 80GB SATA disk with extended temperature range
 - ▲ Solid state disk

COUNTERS /TIMERS

- Real-time clock
- Programmable watchdog timer

BASE AND FABRIC INTERFACES

- Dual star configuration
- PICMG 3.0 base interface compliant, Gigabit Ethernet (1.0Gbps)
- PICMG 3.1 fabric interface compliant
 - ▲ PICMG 3.1, Option 1 – Single, redundant Gigabit Ethernet pair (1.0Gbps)
 - ▲ PICMG 3.1, Option 9 – Single, redundant 10 Gigabit Ethernet pair (10Gbps)
- PICMG 3.0 Update Channel Gigabit Ethernet (1.0Gbps)

EXTERNAL INTERFACES

- Front panel
 - ▲ 10/100/1000Base-T Ethernet (1), RJ-45
 - ▲ Serial console (1), RJ-45
 - ▲ USB 2.0 (2)
- Rear transition module
 - ▲ USB 2.0 (1)
 - ▲ Gigabit Ethernet interfaces (2 or 6), optional, RJ-45
 - ▲ SAS interfaces (2), SFF-8470
 - ▲ 1/2/4Gbps Fibre Channel interfaces (2), optional, prepared for SFP modules

POWER REQUIREMENTS

- Dual-redundant –48 to –60 VDC (TNV-2) rail
- Input range: 39 – 72 VDC
- Power consumption front blade
 - ▲ Full power mode tpd W typical, tpd W max. (w/o RTM)
 - ▲ Power saving mode tpd W typical, tpd W max. (w/o RTM)
- Power consumption RTM
 - ▲ RTM-ATCA-7360 tpd W typical, tpd W max.
 - ▲ RTM-ATCA-7360L tpd W typical, tpd W max.
 - ▲ RTM-ATCA-7360FC tpd W typical, tpd W max.

THERMAL CHARACTERISTICS

- Operating range: –5° C to 55° C
- Airflow requirements according to CP-TA B.4 (B.3 with specific configurations)

RELEVANT BLADE SIZE

- 8U form factor, 280 mm X 322.5 mm, single slot

RELEVANT STANDARDS

- PICMG 3.0 (form factor, IPMI, base interface, hot swap, RTM)
- PICMG 3.1, Option 1, 9

Ordering Information	
Part Number	Description
ATCA-7360-0GB	ATCA processor blade, dual L5518 quad-core (2.13 GHz), 0GB, 10G support (RoHS 6/6)
ATCA-7360-MEM-2G	2GB DDR3 VLP memory module for ATCA-7360 (RoHS 6/6)
ATCA-7360-MEM-4G	4GB DDR3 VLP memory module for ATCA-7360 (RoHS 6/6)
ATCA-7360-MEM-8G	8GB DDR3 VLP memory module for ATCA-7360 (RoHS 6/6)
RTM-ATCA-7360	RTM for the ATCA-7360 blade, 6X GBE, 2X SAS, 1X optional HDD (RoHS 6/6)
RTM-ATCA-7360-L	RTM for the ATCA-7360 BLADE, 2X GBE, 2X SAS, 1X optional HDD (RoHS 6/6)
RTM-ATCA-7360-FC	RTM for the ATCA-7360 blade, 6X GBE, 2X SAS, 2X FC (RoHS 6/6)
ATCA7360-HDD1-SAS	147GB SAS HDD for the RTM-ATCA-7360 (RoHS 6/6)
ATCA7360-HDD2-SAS	300GB SAS HDD for the RTM-ATCA-7360 (RoHS 6/6)
ATCA7360-HDD3-SATA	80GB SATA HDD (ext. temp.) for the RTM-ATCA-7360 (RoHS 6/6)
RJ45-DSUB-ATCA7140	RJ-45 DSUB cable for the ATCA-7140

Regulatory Compliance	
Item	Description
Designed to comply with NEBS	GR-63-CORE, NEBS Physical Protection, Level 3
	GR-1089-CORE, Electromagnetic Compatibility and Electrical Safety – Generic Criteria for Network Telecommunications Equipment. Level 3, Equipment Type 2
Designed to comply with ETSI	ETSI Storage, EN 300 019-1-1, Class 1.2 equipment, Not Temperature Controlled Storage Locations
	ETSI Transportation, EN 300 019-1-2, Class 2.3 equipment, Public Transportation
	ETSI Operation, EN 300 019-1-3, Class 3.2 equipment, Partly Temperature Controlled Locations
	ETSI EN 300 132-2 Environmental Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 2: Operated by direct current (dc)
	ETSI 300 753, Equipment Engineering (EE); Acoustic noise emitted by telecommunications equipment
CE Conformity	Directive 2004/108/EC, Directive 2006/95/EC
EMC	ETSI EN-300-386 Electromagnetic compatibility and Radio spectrum Matters (ERM); telecommunication network equipment; ElectroMagnetic Compatibility (EMC) requirements, Telecommunication equipment room (attended)
	FCC 47 CFR Part 15 Subpart B (US), Class A
	EMC Directive 89/336/EEC (EU)
	AS/NZS 3548 (Australia/New Zealand), Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment
	VCCI Class A (Japan), Voluntary Control Council for Interference by Information Technology Equipment
	CISPR 22 Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement
	CISPR 24 Information technology equipment – Immunity characteristics – Limits and methods of measurement
Safety	Certified to UL/CSA 60950-1, EN 60950-1 and IEC 60950-1 CB Scheme
	Safety of information technology equipment, including electrical business equipment
RoHS/WEEE compliance	DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS)
	DIRECTIVE 2002/96/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL on waste electrical and electronic equipment (WEEE)
Interoperability	Designed to CP-TA ICD 1.1, TPM 1.1

SOLUTION SERVICES

Emerson Network Power provides a portfolio of solution services optimized to meet your needs throughout the product lifecycle. Design services help speed time-to-market. Deployment services include global 24x7 technical support. Renewal services enable product longevity and technology refresh.

Intel and Xeon are trademarks of Intel Corporation or its subsidiaries in the United States and other countries. Microsoft and Windows are registered trademarks of Microsoft Corporation. All other product or service names are the property of their respective owners.

This document identifies products, their specifications, and their characteristics, which may be suitable for certain applications. It does not constitute an offer to sell or a commitment of present or future availability, and should not be relied upon to state the terms and conditions, including warranties and disclaimers thereof, on which Emerson Network Power may sell products. A prospective buyer should exercise its own independent judgment to confirm the suitability of the products for particular applications. Emerson Network Power reserves the right to make changes, without notice, to any products or information herein which will, in its sole discretion, improve reliability, function, or design. Emerson Network Power does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent or other intellectual property rights or under others. This disclaimer extends to any prospective buyer, and it includes Emerson Network Power's licensee, licensee's transferees, and licensee's customers and users. Availability of some of the products and services described herein may be restricted in some locations.

Emerson Network Power.
The global leader in enabling
Business-Critical Continuity™.

■ AC Power

■ Connectivity

■ DC Power

■ Embedded Computing

■ Embedded Power

■ Infrastructure Management & Monitoring

■ Outside Plant

■ Power Switching & Controls

■ Precision Cooling

■ Racks & Integrated Cabinets

■ Services

■ Surge Protection

Emerson Network Power

Offices: Tempe, AZ U.S.A. 1 800 759 1107 or +1 602 438 5720

Paris, France +33 1 60 92 31 20 • Munich, Germany +49 89 9608 2333 • Tel Aviv, Israel +972 9 9560361

Hong Kong +852 2176 3540 • Shanghai, China +8610 8563 1122 • Tokyo, Japan +81 3 5403 2730 • Seoul, Korea +82 2 3483 1500

EmersonNetworkPower.com/EmbeddedComputing

Emerson, Business-Critical Continuity and Emerson Network Power are trademarks of Emerson Electric Co. or one of its affiliated companies. ©2009 Emerson Electric Co.

ATCA7360-D0 06/09