

ATCA-7367

AdvancedTCA Processor Blade

■ Embedded Computing for
Business-Critical Continuity™

PRELIMINARY DATA SHEET


The ATCA-7367 processor blade is an ideal solution for communications equipment requiring powerful processing performance, flexible I/O functionality plus mass storage and network options

- High performance Intel® Architecture processor blade
- One 6-core Intel® Xeon® processor L5638 (2.0 GHz)
- Up to 48GB main memory
- One mid-size AMC site supporting network, storage, I/O and Telecom clocking
- Cost-effective on-board SATA drive option
- Fully supported by the ATCA-736x RTM family
- Hot-swappable hard disk with flexible choice of storage options via RTM
- RAID 0/1 support
- Multiple network and storage I/O connectivity
- PICMG 3.1 Option 1, 9 (1/10GbE) ATCA fabric interface
- Designed for NEBS and ETSI compliance
- Multiple software packages including operating systems

The Emerson Network Power ATCA-7367 is an Intel® Architecture general-purpose blade that delivers a combination of performance and flexibility to help drive the successful implementation of next-generation telecom networks and communication infrastructures. It builds on the AdvancedTCA® (ATCA®) standard to provide the right product at the right time to meet the needs of communication industries.

With one 6-core Intel® Xeon® processor L5638 and one AdvancedMC™ (AMC) site, the ATCA-7367 processor blade enables highest compute performance and I/O functionality in an ATCA form factor. The AMC site features mid-size, single wide AMCs and provides flexible connectivity for networking, storage, Telecom clocking and I/O. The PICMG® 3.1 compliant fabric interface provides 10 Gigabit Ethernet (10Gbps) capabilities for applications requiring higher network throughput in the backplane.


The ATCA-7367 is fully compliant to RTM-ATCA-7360 rear transition module (RTM) family. Multiple network and storage I/O interfaces allow the integration into different network infrastructures such as telecommunication central offices and network data centers. Main memory configuration and mass storage options can be flexibly configured providing a perfect fit to the applications needs. RAID 0 and 1 can be enabled when connecting to external disks or between two sets of ATCA-7367 blades, building a storage cluster capable of high availability operation.

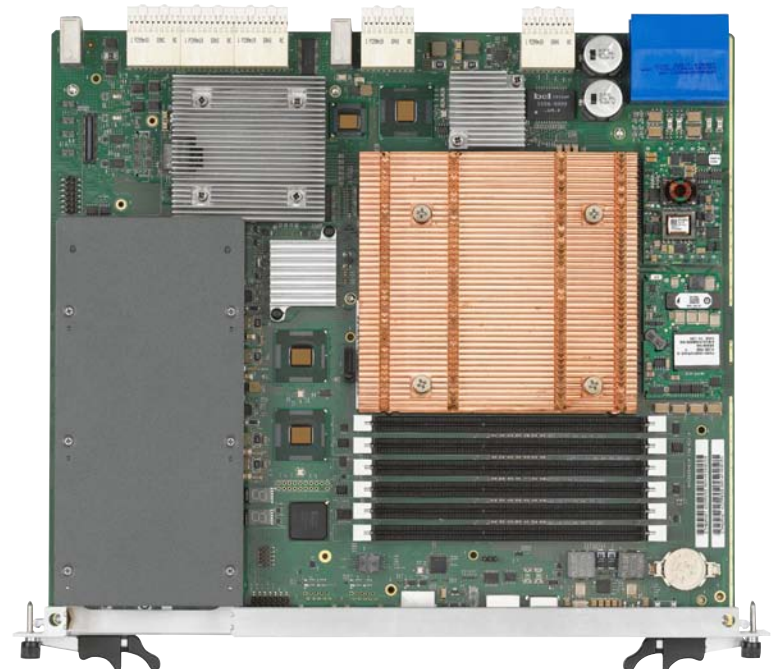

AdvancedTCA®


EMERSON™
Network Power

ATCA-7367 Block Diagram

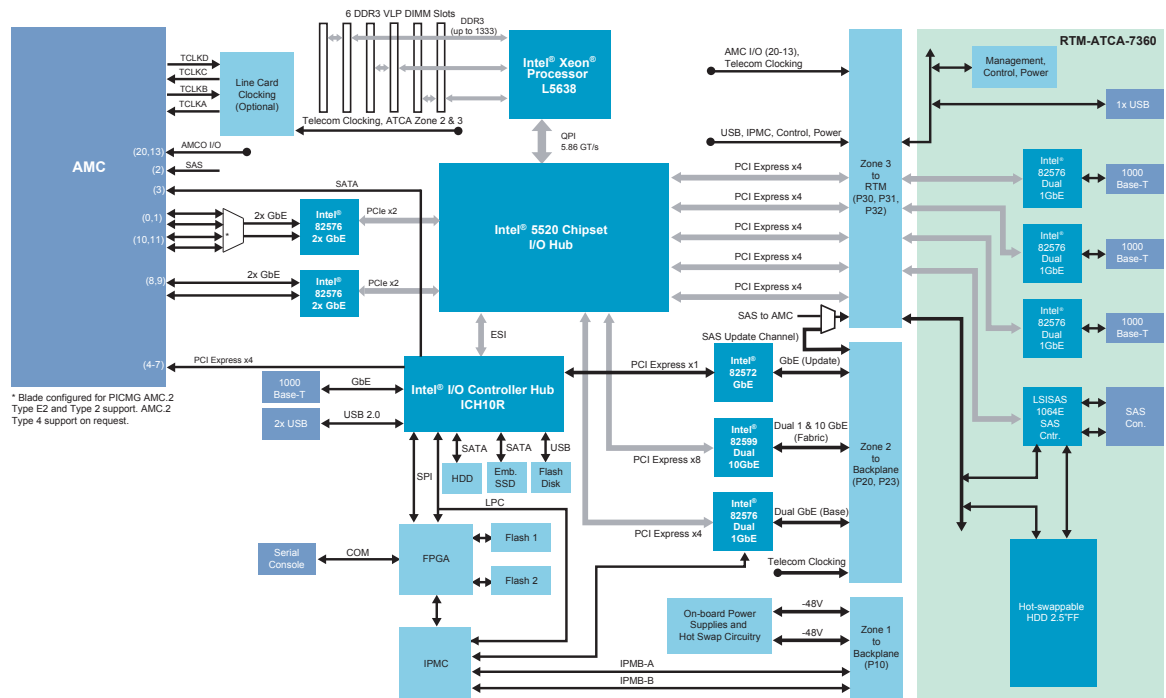

Standard Networking Support

The ATCA-7367 processor blade provides PICMG 3.0 base interface connectivity in a dual star configuration using standard Gigabit Ethernet (GbE) technology. The PICMG 3.1 fabric interface features both dual 10Gbps (Option 9) and dual 1Gbps (Option 1) Ethernet capability. A further 1Gbps Ethernet backplane connection is available on the ATCA update channel. External network connectivity includes 10/100/1000Base-T Ethernet via RJ-45 connector on the blade faceplate. Several rear transition module (RTM) configurations support up to six additional 10/100/1000Base-T connections.

The ATCA-7367 blade features Telecom clock synchronization support including clock sources on the ATCA backplane, ATCA Zone 3 and AMC. The clock circuitry can synchronize on multiple clock sources and can feed derived clocks back into backplane, AMC and Zone 3. It provides hit-less protection switching and hold-off capability for redundant clock sources. The programmable DPPLL can generate clocks in a wide frequency range.

Processor Complex

The Intel® Xeon® processors L5638 can access the entire I/O subsystem via the Intel® 5520 chipset I/O hub. The I/O subsystem consists of:

- Intel® I/O Controller Hub ICH10R
- Intel® 82572 Gigabit Ethernet controller
- Intel® 82576 dual Gigabit Ethernet controllers
- Intel® 82599 dual 10 Gigabit Ethernet controller
- LSI Logic LSISAS1064E SAS controller
- Emulex 4Gbps Fibre Channel controller

Software Support

The ATCA-7367 blade can be configured with a variety of software offerings, from firmware-only to fully integrated and verified software operating environments.

FIRMWARE

Firmware-only blade-level support is offered for customers taking on the integration and verification responsibilities. It provides all the boot and IPMC

firmware required for an ATCA blade. The BIOS firmware includes support for:

- Unified Extensible Firmware Interface (UEFI)
- Power management support, ACPI 3.0b
- Multiple boot options including:
 - ▲ Local and external hard disks
 - ▲ On-board flash disk
 - ▲ External USB boot media
 - ▲ PXE boot via ATCA base interface and front panel Ethernet interface
 - ▲ iSCSI boot via ATCA base interface and external networks
 - ▲ Fibre Channel on RTM
- RAID 0/1 support via LSI SAS BIOS extension
- Serial redirection of the BIOS console
- Serial over LAN of the BIOS console via ATCA base interface
- BIOS upgrade via local host

INTELLIGENT PLATFORM MANAGEMENT CONTROL

The ATCA-7367 features an intelligent platform management controller (IPMC). The IPMC is a management subsystem providing monitoring, event logging, and recovery control. The IPMC serves as the gateway for management applications to access the platform hardware. Features include:

- Compliance with PICMG 3.0 and IPMI 1.5
- Rollback capability if IPMC image upgrade failed
- Firmware (BIOS, IPMC, FPGA) upgradable from IPMI interface (IPMB) and/or locally, PICMG HPM.1 support or via Basic Blade Services (BBS) firmware upgrade utility
- Support for serial port redirection over LAN interface (IPMI 2.0 compliant)

SUPPORTED OPERATING SYSTEMS

- Red Hat RHEL 5.5 certified
- Wind River PNE LE 3.0
- Prepared for Microsoft® Windows® Server 2008
- Prepared for VMware ESX/ESXi (requires VGA on AMC module)

To better exploit the CPU and I/O resources of the blade, RHEL 5.5 supports CPU and I/O virtualization using XEN/KVM. In addition RHEL 5.5 provides code for enabling the processor power management to help enhancing energy efficiency of the blade. Emerson ATCA blades can be configured with optional software that includes Basic Blade Services. When integrated in one of the Emerson Centellis™ ATCA

platforms, the ATCA-7367 comes complete with, and is verified with, Wind River PNE 3.0. This distribution comes with all Linux Support Packages (LSPs) to support Emerson ATCA blades as well as user applications. Basic Blades Services (BBS) software is provided to enable a set of ATCA hardware and software components into a fully integrated and verified telecom platform – the Centellis platform. This platform is ready for customers HA middleware and application environment.

Basic Blade Services include:

- Hardware Platform Management including local IPMC, LED, E-Keying and blade extraction software
- Firmware upgrade utility
- Local management access (CLI)
- Telecom clock routing and generating configuration utility
- Blade device drivers
- HPI client library

RELEVANT STANDARDS

- Linux Foundation
- Service Availability Forum™ (SA Forum)
 - ▲ Hardware Platform Interface (HPI) – HPI-B.02

Please check with your local sales contact for availability of supported Centellis™ platforms.

Rear Transition Modules

Several RTM variants, already introduced with the ATCA-7360 blades, are available to support different I/O configurations at the RTM faceplate.

RTM-ATCA-7360 includes:

- One (1) USB 2.0 interface
- Six (6) Gigabit Ethernet interfaces, 10/100/1000Base-T, RJ-45 connector
- Two (2) SAS interfaces, SFF-8470 connector
- Disk bay for one (1) hot-swappable hard disk, 2.5"

RTM-ATCA-7360-L includes:

- One (1) USB 2.0 interface
- Two (2) Gigabit Ethernet interfaces, 10/100/1000Base-T, RJ-45 connector
- Two (2) SAS interfaces, SFF-8470 connector
- Disk bay for one (1) hot-swappable hard disk, 2.5"

RTM-ATCA-7360-FC supports:

- One (1) USB 2.0 interface
- Six (6) Gigabit Ethernet interfaces, 10/100/1000Base-T, RJ-45 connector

- Two (2) SAS interfaces, SFF-8470 connector
- Two (2) Fibre Channel interfaces, up to 4Gbps, prepared for SFP modules

Hardware

PROCESSOR

- One 6-core Intel® Xeon® processor L5638 (2.0 GHz)
- QuickPath Interface (QPI) – 5.86 GT/s
- 12MB L3 cache (per processor)
- 64-bit mode extension (EM64T)
- SMP support

MEMORY

- DDR3-800/1066/1333 memory controllers integrated into processor
- Total of three independent memory channels
- From 2 to 48GB memory configurations supported
- 4MB primary firmware flash, 4MB redundant flash for failsafe operation
- Reset persistent memory, 16MB SRAM, 64MB flash (optional) Note 1

MASS STORAGE

- Embedded USB flash disk, 4GB (higher capacity upon request)
- On-board 80GB SATA disk with extended temperature range for variants without AMC site
- On-board solid state disk at SATA, 32GB or 64GB (optional) Note 1
- Hot-swappable hard disk on RTM
- RTM hard disk drive options including
 - ▲ Enterprise class disks (various capacity options)
 - ▲ 80GB SATA disk with extended temperature range

BASE AND FABRIC INTERFACES

- Dual star configuration
- PICMG 3.0 base interface compliant, Gigabit Ethernet (1.0Gbps)
- PICMG 3.1 fabric interface compliant
 - ▲ PICMG 3.1, Option 1 – Single, redundant Gigabit Ethernet pair (1.0Gbps)
 - ▲ PICMG 3.1, Option 9 – Single, redundant 10 Gigabit Ethernet pair (10Gbps)
- PICMG 3.0 Update Channel Gigabit Ethernet (1.0Gbps)

COUNTERS /TIMERS

- Real-time clock
- Programmable watchdog timer

AMC SITES

- One (1) mid-size AMC slot (PICMG AMC.0, AMC.1, AMC.2 and AMC.3 compliant)
- Connectivity
 - ▲ Four (4) Gigabit Ethernet interfaces, Type E2 & Type 2 (PICMG AMC.2 Type 4 configuration on request)
 - ▲ PCI Express (x4) interface
 - ▲ Two (2) SAS/SATA interfaces
- TCLK and FCLK support
- Port 20 to 13 I/O routing to ATCA Zone 3

EXTERNAL INTERFACES

- Front panel
 - ▲ 10/100/1000Base-T Ethernet (1), RJ-45
 - ▲ Serial console (1), RJ-45
 - ▲ USB 2.0 (2)
- Rear transition module
 - ▲ USB 2.0 (1)
 - ▲ Gigabit Ethernet interfaces (2 or 6), optional, RJ-45
 - ▲ SAS interfaces (2), SFF-8470
 - ▲ 1/2/4Gbps Fibre Channel interfaces (2), optional, prepared for SFP modules

POWER REQUIREMENTS

- Dual-redundant –48 to –60 VDC (TNV-2) rail
- Input range: 39 – 72 VDC

THERMAL CHARACTERISTICS

- Operating range: –5 °C to 55 °C
- Airflow requirements according to CP-TA B.3/4, depending on blade configuration and maximum processor clock

RELEVANT BLADE SIZE

- 8U form factor, 280 mm X 322.5 mm, single slot

RELEVANT STANDARDS

- PICMG 3.0 (form factor, IPMI, base interface, hot swap, RTM)
- PICMG 3.1, Option 1, 9
- PICMG AMC.0, AMC.1, AMC.2 and AMC.3

Note 1: Persistent memory and solid state disk mutually exclusive

| Ordering Information | |
|----------------------|---|
| Part Number | Description |
| ATCA-7367-12GB | ATCA processor blade, L5638 6-core (2.0 GHz), 3X 4GB, 10G support, AMC site. See Note 1 |
| ATCA-7367-24GB | ATCA processor blade, L5638 6-core (2.0 GHz), 3X 8GB, 10G support, AMC site. See Note 1 |
| ATCA-7367-0GB | ATCA processor blade, L5638 6-core (2.0 GHz), 0GB, 10G support, AMC site. See Note 1 & 2 |
| ATCA-7367-12GB-LS | ATCA processor blade, L5638 6-core (2.0 GHz), 3X 4GB, 10G support, on-board SATA drive, no AMC site |
| ATCA-7367-0GB-LS | ATCA processor blade, L5638 6-core (2.0 GHz), 0GB, 10G support, optional on-board SATA drive, no AMC site. See Note 2 |
| ATCA7367-HDD1-SATA | 80GB SATA HDD (ext. temp.) kit for on-board use with ATCA-7367-xxGB-LS |
| ATCA-7360-MEM-2G | 2GB DDR3 VLP memory module for ATCA-736X product series |
| ATCA-7360-MEM-4G | 4GB DDR3 VLP memory module for ATCA-736X product series |
| ATCA-7360-MEM-8G | 8GB DDR3 VLP memory module for ATCA-736X product series |
| RTM-ATCA-7360 | RTM for the ATCA-736X product series, 6X GbE, 2X SAS, 1X slot for optional HDD |
| RTM-ATCA-7360-L | RTM for the ATCA-736X product series, 2X GbE, 2X SAS, 1X slot for optional HDD |
| ATCA7360-HDD1-SAS | 147GB SAS HDD for the RTM-ATCA-7360. See Note 3 |
| ATCA7360-HDD2-SAS | 300GB SAS HDD for the RTM-ATCA-7360. See Note 3 |
| ATCA7360-HDD3-SATA | 80GB SATA HDD (ext. temp.) for the RTM-ATCA-7360. See Note 3 |
| RTM-ATCA-7360-FC | RTM for the ATCA-736X product series, 6X GBE, 2X SAS, 2X FC. See Note 4 |
| ATCA7360-MMOD-SATA1 | 32GB on-board solid state disk at SATA for ATCA-736X product series. See Note 5 |
| ATCA7360-MMOD-SATA2 | 64GB on-board solid state disk at SATA for ATCA-736X product series. See Note 5 |
| ATCA7360-SFMMOD | Reset persistent memory, 16MB SRAM, 64MB flash for the ATCA-736X product series. See Note 5 |
| AMC-FILLER-MS | AMC filler panel mid-size for ATCA-F12X, ATCA-F140 and ATCA-7367 |
| RJ45-DSUB-ATCA7140 | RJ-45 DSUB cable for the ATCA-7140, 7150, 7350, 736X |
| SA-BBS-WR30-7367 | CD - BBS SW and WR PNE 3.0 for ATCA-7367 |

Note 1: AMC filler panel not included

Note 2: No memory installed

Note 3: HDD kit option for RTM-ATCA-7360 and RTM-ATCA-7360-L

Note 4: RoHS 5/6 (lead exemption)

Note 5: Persistent memory and solid state disk mutually exclusive

| Regulatory Compliance | |
|---------------------------------------|--|
| Item | Description |
| Designed to comply with NEBS, Level 3 | Telcordia GR-63-CORE, NEBS Physical Protection |
| | Telcordia GR-1089-CORE, Electromagnetic Compatibility and Electrical Safety – Generic Criteria for Network Telecommunications Equipment. Equipment Type 2 |
| Designed to comply with ETSI | ETSI Storage, EN 300 019-1-1, Class 1.2 equipment, Not Temperature Controlled Storage Locations |
| | ETSI Transportation, EN 300 019-1-2, Class 2.3 equipment, Public Transportation |
| | ETSI Operation, EN 300 019-1-3, Class 3.1 (E) equipment, Temperature Controlled Locations |
| | ETSI EN 300 132-2 Environmental Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 2: Operated by direct current (dc) |
| | ETSI ETS 300 753, Equipment Engineering (EE); Acoustic noise emitted by telecommunications equipment |
| CE Conformity | Directive 2004/108/EC, Directive 2006/95/EC |
| EMC | ETSI EN 300 386 Electromagnetic compatibility and Radio spectrum Matters (ERM); telecommunication network equipment; ElectroMagnetic Compatibility (EMC) requirements, Telecommunication equipment room (attended) |
| | CFR 47 FCC Part 15 Subpart B, Class A (US); FCC Part 15 - Radio Frequency Devices; Subpart B: Unintentional Radiators |
| | AS/NZS CISPR 22 (Australia/New Zealand), Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment |
| | VCCI Class A (Japan), Voluntary Control Council for Interference by Information Technology Equipment |
| | CISPR 22 Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement |
| | CISPR 24 Information technology equipment – Immunity characteristics – Limits and methods of measurement |
| Safety | Certified to UL/CSA 60950-1, EN 60950-1 and IEC 60950-1 CB Scheme |
| | Safety of information technology equipment, including electrical business equipment |
| RoHS/WEEE compliance | DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS) |
| | DIRECTIVE 2002/96/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL on waste electrical and electronic equipment (WEEE) |
| Interoperability | Designed to operate within a CP-TA B.3/4 system environment depending on board configuration and maximum processor clock frequency |

SOLUTION SERVICES

Emerson Network Power provides a portfolio of solution services optimized to meet your needs throughout the product lifecycle. Design services help speed time-to-market. Deployment services include global 24x7 technical support. Renewal services enable product longevity and technology refresh.

PICMG, AdvancedTCA, ATCA, AdvancedMC and the AdvancedTCA logo are trademarks of PICMG. Service Availability is a proprietary trademark used under license. Intel and Xeon are trademarks of Intel Corporation or its subsidiaries in the United States and other countries. Microsoft and Windows are registered trademarks of Microsoft Corporation. All other product or service names are the property of their respective owners.

This document identifies products, their specifications, and their characteristics, which may be suitable for certain applications. It does not constitute an offer to sell or a commitment of present or future availability, and should not be relied upon to state the terms and conditions, including warranties and disclaimers thereof, on which Emerson Network Power may sell products. A prospective buyer should exercise its own independent judgment to confirm the suitability of the products for particular applications. Emerson Network Power reserves the right to make changes, without notice, to any products or information herein which will, in its sole discretion, improve reliability, function, or design. Emerson Network Power does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent or other intellectual property rights or under others. This disclaimer extends to any prospective buyer, and it includes Emerson Network Power's licensee, licensee's transferees, and licensee's customers and users. Availability of some of the products and services described herein may be restricted in some locations.

Emerson Network Power.
The global leader in enabling
Business-Critical Continuity™.

- AC Power
- Connectivity
- DC Power
- Embedded Computing

- Embedded Power
- Infrastructure Management & Monitoring
- Outside Plant
- Power Switching & Controls

- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

Emerson Network Power

Offices: Tempe, AZ U.S.A. 1 800 759 1107 or +1 602 438 5720
Paris, France +33 1 60 92 31 20 • Munich, Germany +49 89 9608 2333 • Tel Aviv, Israel +972 9 9560361
Hong Kong +852 2176 3540 • Shanghai, China +86 21 3395 0289 • Tokyo, Japan +81 3 5403 2730 • Seoul, Korea +82 2 3483 1500

EmersonNetworkPower.com/EmbeddedComputing

Emerson, Business-Critical Continuity and Emerson Network Power are trademarks of Emerson Electric Co. or one of its affiliated companies. ©2010 Emerson Electric Co.

ATCA7367-D2 05/10