

# NETernity™ RM982RC

VME 24-Port Rear I/O Configuration Managed Layer-2 Gigabit Ethernet Switch with OpenWare™ Lite Switch Management Environment

## Features

- 6U VME form factor
- 24-port Gigabit Ethernet switch
- Configuration managed solution
- Control and monitoring capabilities via local or remote access
- On-board management processor
- L-2 switching at wire-speed
- OpenWare™ Lite Switch management environment
- 24 copper rear I/O ports or 22 copper rear I/O ports plus two fiber ports routed to the front. Front ports can be 10/100/1000BaseT, 1000BaseLX, or 1000BaseSX
- Auto address learning
- Auto address aging
- Auto MDI/MDIX support
- 10/100/1000BaseT auto-negotiating, supports full- or half-duplex
- Support for Jumbo Frames
- Front panel Link and Activity status LEDs
- Polyurethane or acrylic conformal coating optional
- RoHS compliant
- 22- and 24-port rear transition modules available

## Key Specifications

- IEEE 802.3-2005
- IEEE 802.1Q (VLAN tagging)
- IEEE 802.1D (Spanning Tree Protocol)
- MDI/MDIX control
- RoHS 2002/95/EC compliant

NETernity™ RM982RC is a 24-port Layer 2 configuration managed Ethernet embedded switch offering full L2 wire speed switching and routing. Switch configuration and management are provided by the exclusive OpenWare Lite switch management environment.

Designed to meet the needs of a wide range of applications such as commercial, industrial and government systems, the 6U VME form factor RM982RC facilitates communications within a chassis as well as supporting the network outside the chassis.

The RM982RC has 24 10/100/1000BaseT ports routed to rear I/O. Versions of the switch are also available with 22 10/100/1000BaseT ports routed to the rear and two Gigabit Ethernet ports routed through the front panel. Front ports can be 10/100/1000BaseT, 1000BaseSX or 1000BaseLX. Polyurethane or acrylic conformal coating is optional.

## Switch Fabric Features

- Supports Layer 2 (L2) packet switching. Packets are categorized by the MAC address.
- Virtual LANs (VLANs) (IEEE 802.1Q) defines a forwarding (switching) domain; supports up to 4094 VLANs.
- Multiple Spanning Tree Protocol (MSTP) (IEEE 802.1D-2004) enables automatic and rapid determination of an optimal loop-free topology from an arbitrary network of enabled switches with duplicate and redundant connections; supports rapid reconfiguration if a link or switch fails; backward compatible with RSTP and STP.
- Port mirroring eases debug and packet pattern study. This is a method to observe on one port traffic that is flowing on another port.
- Trunking or manual link aggregation
- SNMP support

## OpenWare Lite Switch Management Environment

OpenWare Lite is available exclusively on selected NETernity configuration managed Layer 2 Ethernet switches. Configuration and monitoring functions are accessible from a serial console or via a network. Supported access methods include Telnet, SSH and SNMP.

OpenWare Lite features:

- Easy deployment
- Linux® based software allows faster implementation and easy updates to firmware.
- A familiar Linux command line interface and remote Telnet user interface support allows users to select how they interact with the switch.
- Portability across switch fabrics and processor environments.

## Why choose GE Fanuc NETernity Ethernet Switches?

GE Fanuc has a wealth of expertise in Military, Commercial and Telecommunications markets. This makes us unique in the embedded computing industry – we understand application requirements and we know communication protocols.

Our line of NETernity Ethernet Switches is unmatched. Not only is our product selection extensive, but the switches themselves provide maximum flexibility, performance, and density.

NETernity Ethernet Switches are available in a variety of form factors, interfaces, levels of ruggedness, port configurations, media support, and types of management.

Managed switches are Layer 2/3+ switches with control and monitoring capabilities via local or remote access. Configuration Managed switches are Layer 2 switches with control and monitoring capabilities via local or remote access. Unmanaged switches are Layer 2 switches with no



# NETernity™ RM982RC VME 24-port Configuration Managed Gigabit Ethernet Switch

operator interfacing and are designed for quick deployment in well defined applications.

Call GE Fanuc Intelligent Platforms' knowledgeable sales team for help in selecting the switch that best meets your applications requirements.

## Specifications

### Physical Interface

- 24 Gigabit Ethernet ports routed to rear, or 22 copper ports routed to rear + two front Gigabit Ethernet ports
- All rear ports are 10/100/1000BaseT; two front ports can be 10/100/1000BaseT, 1000BaseLX or 1000BaseSX
- RJ-45 connectors (10/100/1000BaseT); LC connectors (1000BaseLX and 1000BaseSX)

### Dimensions

- 6U single slot VME for m factor
- 22 and 24 port RTMs are dual slot

### Weight

- 0.99 lbs (0.45 Kg)

### Power Requirements

- 24 copper ports: 29 W (max)
- 22 copper ports + 2 fiber ports: 31 W (max)

### Environmental

- Operating Temperature: 0° to +65 °C
- Storage Temperature: -40° to +125 °C
- Relative Humidity: 5% to 95%, noncondensing


### MTBF

- 384,616 hours, ground benign controlled @ 40°C

### Regulatory Compliance

- European Union (CE Mark)
  - EN55022 Radiated Emissions Class A
  - EN55022 Conducted Emissions Class A
- United States
  - FCC 47 Part 15, Class A
- Safety:
  - UL60950-1
  - CSA C22.2, No. 60950-1
  - EN60950-1 (Low Voltage)
- RoHS 6/6: European Community Directive 2002/95/EC

## Block Diagram

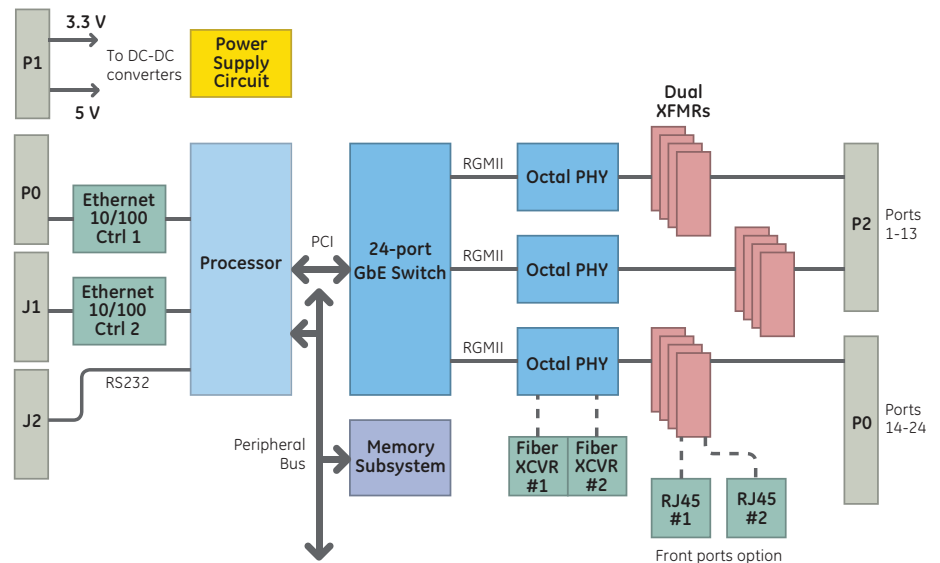

## Ordering Information

<b>RM982RC-200</b>	6U VME NETernity configuration managed Layer 2 Ethernet switch; 24 rear I/O 10/100/1000BaseT copper ports; OpenWare Lite; RoHS
<b>RM982RC-201</b>	6U VME NETernity configuration managed Layer 2 Ethernet switch; 22 rear I/O 10/100/1000BaseT copper ports + 2 front 1000BaseSX ports; OpenWare Lite; RoHS
<b>RM982RC-202</b>	6U VME NETernity configuration managed Layer 2 Ethernet switch; 22 rear I/O 10/100/1000BaseT copper ports + 2 front 1000BaseLX ports; OpenWare Lite; RoHS
<b>RM982RC-203</b>	6U VME NETernity configuration managed Layer 2 Ethernet switch; 22 rear I/O 10/100/1000BaseT copper ports + 2 front 10/100/1000BaseT ports; OpenWare Lite; RoHS
<b>TRRM922RC</b>	24-port rear transition module; dual slot; RoHS
<b>TRRM922RC-22</b>	22-port rear transition module; dual slot; RoHS
<b>TRRM922RC-12</b>	12-port rear transition module; single slot; RoHS

For Conformal Coating, add -CC at end of part number for polyurethane or -CCA for acrylic

## About GE Fanuc Intelligent Platforms

GE Fanuc Intelligent Platforms is a leading global provider of embedded computing solutions for a wide range of industries and applications. Our comprehensive product offering includes many types of I/O, single board computers, high performance signal processors, fully integrated, rugged systems including flat panel displays, plus high speed networking and communications products. The company is headquartered in the U.S. and has design, manufacturing and support offices throughout the world. Whether you're looking for one of our standard products or a fully custom solution, GE Fanuc Intelligent Platforms has the breadth, experience and 24/7 support to deliver what you need. For more information, visit [www.gefanuc.com](http://www.gefanuc.com).

## GE Fanuc Intelligent Platforms Information Centers

Americas:  
1 800 322 3616 or 1 256 880 0444

Asia Pacific:  
+81 3 5544 3973

EMEA:  
Germany: +49 821 5034-0  
UK: + 44 1327 359444

## Additional Resources

For more information, please visit the GE Fanuc Intelligent Platforms web site at:

[www.gefanuc.com](http://www.gefanuc.com)

