


# C218Turbo Series

## 8-port Intelligent RS-232 Universal PCI, ISA Boards

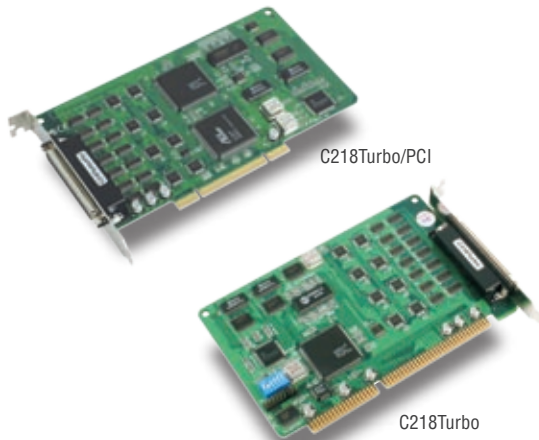

### Features

- > 8-port RS-232 intelligent communication board
- > Effectively reduces CPU loading
- > Versatile OS driver support
- > Various connection options
- > Data transmission speed up to 921.6 Kbps
- > Embedded memory up to 512 KB
- > High throughput for great performance



### : Overview

The C218Turbo Series allows you to install additional RS-232 serial communication ports on your PC by providing 8 serial ports per board for connecting all types of serial devices. With its additional ASIC, RISC processor and large I/O buffer design, the C218Turbo Series can maintain a sustained high throughput on all eight ports simultaneously,

while occupying only a small part of the host's processor time. The boards' versatile OS driver support truly fulfills the needs of our customers' varied applications. This product is available for use on either a PCI, PCI-X, or ISA bus, with all types offering a reliable, high performance solution for serial multiport communications.

### : Specifications

#### Hardware

**Processor:** TMS320BC52-40 RISC CPU  
**I/O controller:** 16C550C or compatible x 8  
**Memory:** 512 KB

#### Interface

**Bus:** 32-bit Universal PCI or 16-bit ISA  
**Max. No. of ports:** 32 (4 boards)

#### Performance

**Baudrate:** 50 bps to 921.6 Kbps

#### Configuration

**Parity:** None, Even, Odd, Space, Mark  
**Data bits:** 5, 6, 7, 8  
**IRQ:** ISA: 2(9), 3, 4, 5, 7, 10, 11 (Default), 12, 15  
 UPCI: BIOS assigned

#### Power and Environment

##### Power requirements:

C218Turbo/PCI: 530 mA max. (+5V), 110 mA max. (+12V)  
 35 mA max. (-12V)  
 C218Turbo: 400 mA max. (+5V), 100 mA max. (+12V)  
 60 mA max. (-12V)

**Operating Temperature:** 0 to 55°C (32 to 131°F)

**Operating Humidity:** 5 to 95% RH

**Storage Temperature:** -20 to 85°C (-4 to 185°F)

#### Dimensions

**C218Turbo/PCI:** 180 x 105 mm (W x D)

**C218Turbo:** 170 x 115 mm (W x D)


#### Regulatory Approvals

EN55022 Class A, EN55024, EN61000-3-2, EN61000-3-3,  
 FCC Part 15 Class A

**Warranty:** 5 years

## Connection Options

### Male DB9



PIN	RS-232	PIN	RS-232
1	DCD	5	GND
2	RxD	6	DSR
3	TxD	7	RTS
4	DTR	8	CTS

#### OPT8-M9

Male DB9 x 8, 150 cm Cable




#### CBL-M62M9x8-100 (OPT8D)

Male DB9 x 8, 100 cm Cable



### Male DB25



PIN	RS-232	PIN	RS-232
2	TxD	6	DSR
3	RxD	7	GND
4	RTS	8	DCD
5	CTS	20	DTR

#### OPT8B

Male DB25 x 8, 150 cm Cable




#### CBL-M62M25x8-100 (OPT8C)

Male DB25 x 8, 100 cm Cable



### Female DB25



PIN	RS-232	PIN	RS-232
2	RxD	6	DTR
3	TxD	7	GND
4	CTS	8	DCD
5	RTS	20	DSR

#### OPT8F/Z (RS-422)

Female DB25 x 8, 150 cm Cable

PIN	RS-422/4-wire RS-485
2	RxD+(B)
3	TxD+(B)
7	GND
14	RxD-(A)
16	TxD-(A)

#### OPT8K/OPT8I (RS-422/485)

Female DB25 x 8, 150 cm Cable

PIN	2-wire RS-485
2	Data+(B)
7	GND
14	Data-(A)

#### OPT8A

Female DB25 x 8, 150 cm Cable



#### OPT8S

Female DB25 x 8, 150 cm Cable  
25 KV ESD Surge Protection



#### OPT8F/Z (RS-422)

Female DB25 x 8, 150 cm Cable  
110 or 230 VAC power Adaptor  
(max. speed 115.2K bps)



\* OPT8 with 2 KV Isolation


#### OPT8K/OPT8I (RS-422/485)

Female DB25 x 8, 150 cm Cable  
110 or 230 VAC power Adaptor



\* OPT8I with 2 KV Isolation

### 8-Pin RJ45



PIN	RS-232	PIN	RS-232
1	DSR	5	RxD
2	RTS	6	DCD
3	GND	7	CTS
4	TxD	8	DTR

#### OPT8-RJ45

8-pin RJ45 x 8, 30 cm Cable



## Ordering Information

**C218Turbo/PCI:** Universal PCI bus, 8-port intelligent serial board

**C218Turbo:** ISA bus, 8-port intelligent serial board

### Package Checklist

- C218Turbo/PCI or C218Turbo board with standard bracket
- Document & Software CD-ROM
- Quick Installation Guide

### Optional Accessories (choose one per board)

\*Refer to the Connection Options shown above.