


# CP-102U/UL

## 2-port RS-232 Universal PCI serial boards

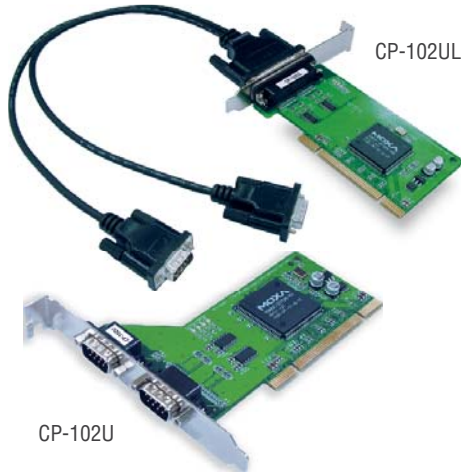

- > Over 800 Kbps data throughput for top performance
- > 921.6 Kbps maximum baudrate for super fast data transmission
- > 128-byte FIFO and on-chip H/W, S/W flow control
- > Compatible with 3.3/5V PCI and PCI-X
- > Drivers provided for Windows (2000, XP/2003/Vista/2008 x86/x64, 9X/ME/NT), Windows CE 5.0/6.0, Windows XP Embedded, DOS, Linux 2.4, Linux 2.6 (x86/x64), FreeBSD 4/5, QNX 6, SCO Open Server 5/6, UnixWare 7
- > 15 KV ESD protection on the board
- > The CP-102UL's MD1 low profile form factor fits small-sized PCs
- > Wide temperature model available for -40 to 85°C environments

The certification logos shown here apply to some or all of the products in this section. For details, see "Regulatory Approvals" under "Specifications" below.



### : Overview

The CP-102U and CP-102UL are 2-port Universal PCI boards designed for POS and ATM applications. They are a top choice of industrial automation engineers and system integrators, and support many different operating systems, including Windows, Linux, and even Unix. In addition, each of the boards' RS-232 serial ports supports a super

fast 921.6 Kbps baudrate. The CP-102U and CP-102UL provide full modem control signals to ensure compatibility with a wide range of serial peripherals, and they work with both 3.3V and 5V PCI buses, allowing the boards to be installed in virtually any available PC server.

### : Designed for Standard and Small-sized PCs

The CP-102UL is a low profile board that only requires a 5 VDC power supply. It is compatible with both a 3.3V and 5V PCI bus, which means

that the CP-102UL fits any host computer, ranging from shoebox to standard-sized PCs.

### : Top Serial Performance

Moxa's 20-plus years of experience in serial board design is now concentrated in a new high performance serial data transmission chip. The Turbo Serial Engine™ chip provides serial boards with a 128-byte

FIFO, on-chip hardware and software flow control, and burst data mode. Thanks to the Turbo Serial Engine™, Moxa is able to offer the world's best performing smart serial boards.

### : Drivers Provided for Windows, Linux, and Unix

Moxa continues to support a wide variety of operating systems, and the CP-102U/UL boards are no exception. Reliable Windows COM and Linux/Unix TTY drivers are provided for all Moxa boards, and other

operating systems, such as WEPOS, are also supported for embedded integration.

### : Specifications

#### Hardware

**Comm. Controller:** MU860 (16C550C compatible)

**Bus:** 32-bit Universal PCI

#### Connector:

CP-102U: DB9 male x 2

CP-102UL: DB25 female

#### Serial Interface

**Number of Ports:** 2 (only one IRQ required)

**Serial Standards:** RS-232

**Max. No. of Boards per PC:** 4

#### Serial Line Protection

**ESD Protection:** 15 KV on the board

#### Performance

**Baudrate:** 50 bps to 921.6 Kbps

#### Serial Communication Parameters

**Data Bits:** 5, 6, 7, 8

**Stop Bits:** 1, 1.5, 2

**Parity:** None, Even, Odd, Space, Mark

**Flow Control:** RTS/CTS, XON/XOFF

**I/O Address:** Assigned by BIOS

**IRQ:** Assigned by BIOS

### Serial Signals

**RS-232:** TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND

### Driver Support

**Operating Systems:** Windows (2000, XP/2003/Vista/2008 x86/x64, 9X/ME/NT), Windows CE 5.0/6.0, Windows XP Embedded, DOS, Linux 2.4, Linux 2.6 (x86/x64), FreeBSD 4/5, QNX 6, SCO Open Server 5/6, UnixWare 7

### Physical Characteristics

#### Dimensions:

CP-102U: 120 x 120 mm (3.15 x 4.72 in)

CP-102UL: 64.5 x 120 mm (2.53 x 4.72 in)

### Environmental Limits

#### Operating Temperature:

Standard Models: 0 to 55°C (32 to 131°F)

Wide Temp. Models: -40 to 85°C (-40 to 185°F)

**Operating Humidity:** 5 to 95% RH

**Storage Temperature:** -20 to 85°C (-4 to 185°F)

### Regulatory Approvals

**FCC:** Part 15 Class B

**EMS:** EN55022, EN55024, EN61000-3-2, EN61000-3-3, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11 (DIPS)

### Power Requirements

**Power Consumption:** 93 mA @ +5 V


### Warranty

**Warranty Period:** 5 years


**Details:** See [www.moxa.com/warranty](http://www.moxa.com/warranty)

### Dimensions

**CP-102U**

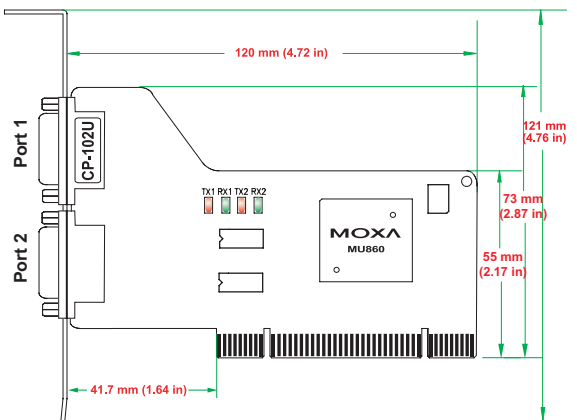

**CP-102UL**

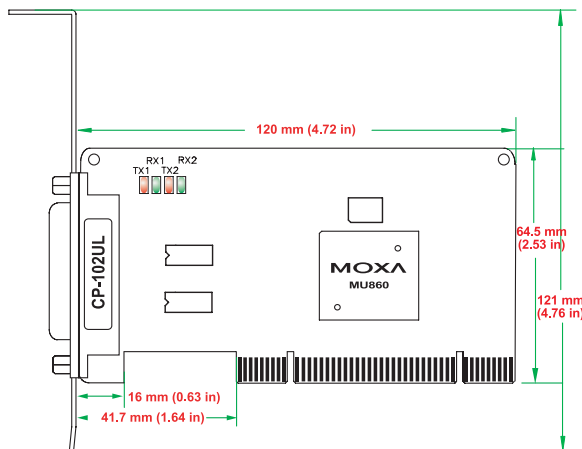

## Ordering Information

### Available Models

**CP-102U:** 2-port RS-232 Universal PCI serial board, 0 to 55°C operating temperature

**CP-102UL-DB9M:** 2-port RS-232 low profile Universal PCI serial board, 0 to 55°C operating temperature (includes DB9 male cable)

**CP-102U-T:** 2-port RS-232 Universal PCI serial board, -40 to 85°C operating temperature

**CP-102UL-T:** 2-port RS-232 low profile Universal PCI serial board, -40 to 85°C operating temperature

### Package Checklist

- CP-102U or CP-102UL board
- Document and Software CD
- Low profile bracket (CP-102UL only)
- Quick Installation Guide (printed)
- Warranty Card

### Connection Options (can be purchased separately)

#### CBL-M25M9x2-50

DB25 male to DB9 male x 2 (50 cm cable)



PIN	RS-232
1	DCD
2	RxD
3	TxD
4	DTR
5	GND
6	DSR
7	RTS
8	CTS

#### DB9 male

