

# EDS-516A Series

## 16-Port Managed Ethernet Switch



### Highlights

- > 16 fast Ethernet ports for copper and fiber
- > Turbo Ring (recovery time < 20 ms), RSTP/STP (IEEE802.1W/D) for Ethernet redundancy
- > QoS, IGMP snooping/GMRP, VLAN, LACP, SNMP V1/V2c/V3, RMON supported
- > IEEE802.1X and https/SSL enhance network security
- > ABC-01 (Automatic Backup Configurator) for system configuration backup



### Features

#### Industrial Networking Capability

- Turbo Ring (recovery time < 20 ms at full load) and RSTP/STP (IEEE802.1W/D)
- IGMP Snooping and GMRP for filtering multicast traffic from industrial Ethernet protocols
- Port-based IEEE802.1Q VLAN and GVRP protocol to ease network planning
- QoS-IEEE802.1p/1Q and TOS/DiffServ to increase determinism
- 802.3ad, LACP for optimum bandwidth utilization
- IEEE802.1X and https/SSL to enhance network security
- SNMP V1/V2c/V3 for different levels of network management
- RMON for efficient network monitoring and proactive capability

#### Designed for Industrial Applications

- Bandwidth management prevents unpredictable network status
- ABC-01 (Automatic Backup Configurator) for system configuration backup
- Port Lock for access from unauthorized MAC address

- Port mirroring for online debugging
- Automatic warning by exception through e-mail and relay output
- Digital inputs to integrate sensors and alarms with IP networks
- Automatic recovery of connected device's IP addresses
- Line-swap fast recovery
- Regular (0 to 60°C) and extended (-40 to 75°C) operating temperature models available
- IP30, rugged high-strength case
- DIN-Rail or panel mounting capability
- Ping commands to identify network segment integrity
- Redundant dual 12-45 VDC power inputs and over current protection

#### Recommended Software and Accessories

- ABC-01 RS-232 RJ45-based Automatic Backup Configurator
- EDS-SNMP OPC Server Pro
- DR series DIN-Rail 24 VDC power supplies

### Introduction

EDS-516A is a standalone 16-port managed Ethernet switch. With the technology of Turbo Ring (recovery time < 20 ms), EDS-516A increases the reliability and availability of your industrial Ethernet network. EDS-516A also supports intelligent network management

functions, including QoS, IGMP Snooping/GMRP, VLAN, Port Trunking, SNMP V1/V2c/V3, IEEE802.1X, and https/SSL for optimal network planning.

### Specifications

#### Technology

**Standards:** IEEE802.3, 802.3u, 802.3x, 802.1D, 802.1W, 802.1Q, 802.1p, 802.1X, 802.3ad

**Protocols:** IGMP V1/V2/V3 device, GMRP, GVRP, SNMP V1/V2c/V3, DHCP Server/Client, DHCP Option 82, BootP, TFTP, SNTP, SMTP, RARP, RMON

**MIB:** MIB-II, Ethernet-Like MIB, P-BRIDGE MIB, Q-BRIDGE MIB, Bridge MIB, RSTP MIB, RMON MIB Group 1, 2, 3, 9

**Flow Control:** IEEE802.3x flow control, back pressure flow control

### Interface

**RJ45 Ports:** 10/100BaseT(X) auto negotiation speed

**Fiber Ports:** 100BaseFX (SC/ST connector)

**Console:** RS-232 (RJ45)

**LED Indicators:** PWR1, PWR2, FAULT, 10/100M (TP port), 100M (Fiber port), MASTER, COUPLER

**Alarm Contact:** Two relay outputs with current carrying capacity of 1A @ 24 VDC

**Digital Inputs:** Two inputs with the same ground, but electrically isolated from the electronics

- +13 to +30V for state “1”
- -30 to +3V for state “0”
- Max. input current: 8 mA

### Optical Fiber

**Distance:**

Multi mode: 0 to 5 km, 1300 nm (50/125 μm, 800 MHz\*km)  
0 to 4 km, 1300 nm (62.5/125 μm, 500 MHz\*km)

**Min. TX Output:** Multi mode: -20 dBm

**Max. TX Output:** Multi mode: -14 dBm

**RX Sensitivity:** -34 to -30 dBm (Multi)

### Power

**Input Voltage:** 24 VDC (12 to 45 VDC), redundant dual inputs

**Input Current (@24V):** 0.31A (EDS-516A), 0.39A (EDS-516A-MM-SC/ST)

**Connection:** Two removable 6-pin terminal blocks

**Overload Current Protection:** Present

**Reverse Polarity Protection:** Present

### Mechanical

**Casing:** IP30 protection

**Dimensions (W x H x D):** 95 x 135 x 140 mm  
3.74 x 5.31 x 5.51 in.

**Weight:** 1586 g

**Installation:** DIN-Rail, Wall Mounting (optional kit)

### Environmental

**Operating Temperature:** 0 to 60°C (32 to 140°F)  
-40 to 75°C (-40 to 167°F) for T models

**Storage Temperature:** -40 to 85°C (-40 to 185°F)

**Ambient Relative Humidity:** 5 to 95% (non-condensing)

### Regulatory Approvals

**Safety:** UL508, UL60950-1, CSA C22.2 No. 60950-1, EN60950-1

**Hazardous location:**

UL/cUL Class I, Division 2, Groups A, B, C, and D (Pending)  
ATEX Class I, Zone 2, EEx nC IIC (Pending)

**Maritime:** DNV, GL

**EMI:** FCC Part 15, CISPR (EN55022) class A

**EMS:** EN61000-4-2 (ESD), level 3  
EN61000-4-3 (RS), level 3  
EN61000-4-4 (EFT), level 2  
EN61000-4-5 (Surge), level 3  
EN61000-4-6 (CS), level 3  
EN61000-4-8  
EN61000-4-11

**Shock:** IEC60068-2-27

**Freefall:** IEC60068-2-32

**Vibration:** IEC60068-2-6

**MTBF:** 247,000 hrs


Database: MIL-HDBK-217F, GB 25°C

\*Please check MOXA's website for the most up-to-date certification status.

### Warranty

5 years

## Dimensions (unit = mm)

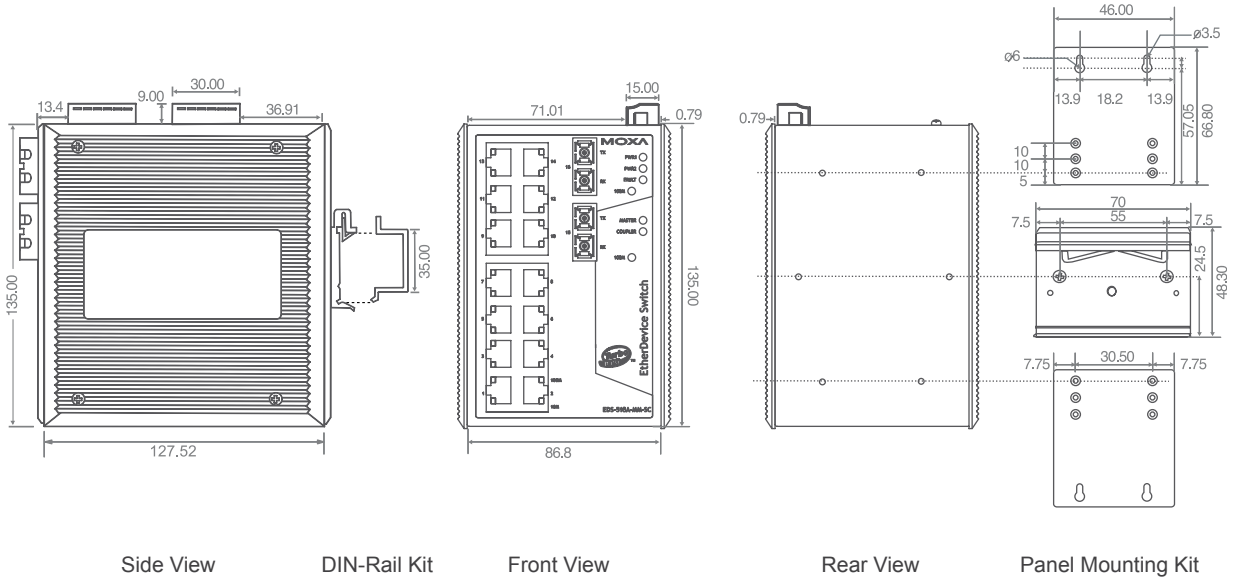

## Ordering Information

EDS-516A-AA-BB-C

Ordering Code Definition	Fiber Port	FO Connector	Operating Temperature
	<b>MM:</b> Two Multi Mode	<b>SC:</b> SC Connector <b>ST:</b> ST Connector	<b>T:</b> Operating Temp. -40 to 75°C (Standard Models: 0 to 60°C)
Available Models	<b>Standard:</b> <ul style="list-style-type: none"> <li>EDS-516A</li> <li>EDS-516A-MM-SC</li> <li>EDS-516A-MM-ST</li> </ul>		<b>Wide Temperature:</b> <ul style="list-style-type: none"> <li>EDS-516A-T</li> <li>EDS-516A-MM-SC-T</li> <li>EDS-516A-MM-ST-T</li> </ul>
Optional Accessories	<ul style="list-style-type: none"> <li><b>ABC-01:</b> Industrial RS-232, RJ45-based, Automatic Backup Configurator</li> <li><b>DR-4524:</b> 45W/2A DIN-Rail 24 VDC Power Supply, 85 to 264 VAC input</li> <li><b>DR-75-24:</b> 75W/3.2A DIN-Rail 24 VDC Power Supply, 85 to 264 VAC input</li> <li><b>DR-120-24:</b> 120W/5A DIN-Rail 24 VDC Power Supply, 88 to 132 VAC/176 to 264 VAC input by switch</li> <li><b>WK-46:</b> Wall Mounting Kit</li> </ul>		