


LDP1602 LCD Display Module

LDP1602 LCD Display Module for ioLogik 2000 Series

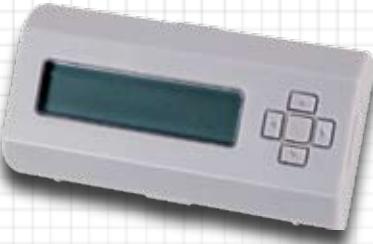

Features

- Hot-pluggable display module for ioLogik Active Remote I/O and Serial Remote I/O servers
- Easy, portable configuration kit for IP display and configuration
- Direct display for analog value and digital input, counter status
- No battery required (powered by I/O server)



: Installing the LCD Module

1. Take off the cover of the ioLogik server



2. Plug in the LCD display module



3. Instantly check and configure IP address



4. Check counter or analog value



: Specifications

LCD display: 16 x 2 text display in English

Operating temperature: 0 to 55°C (32 to 131°F),
5 to 95% RH

Storage temperature: -20 to 70°C (-4 to 158°F),
5 to 95% RH

: Ordering Information

LDP1602: LCD Display module for ioLogik 2000 series