


TRENTON
SYSTEMS[®]

Engineered For Reliability




Effortless Integration

- 4 Full Height Full Length PCIe
 - 3 - x16, 1 - x4
- 2U", 19" rackmount, 18" depth
- Install Option Cards Without Disassembly
- Redundant PSU options

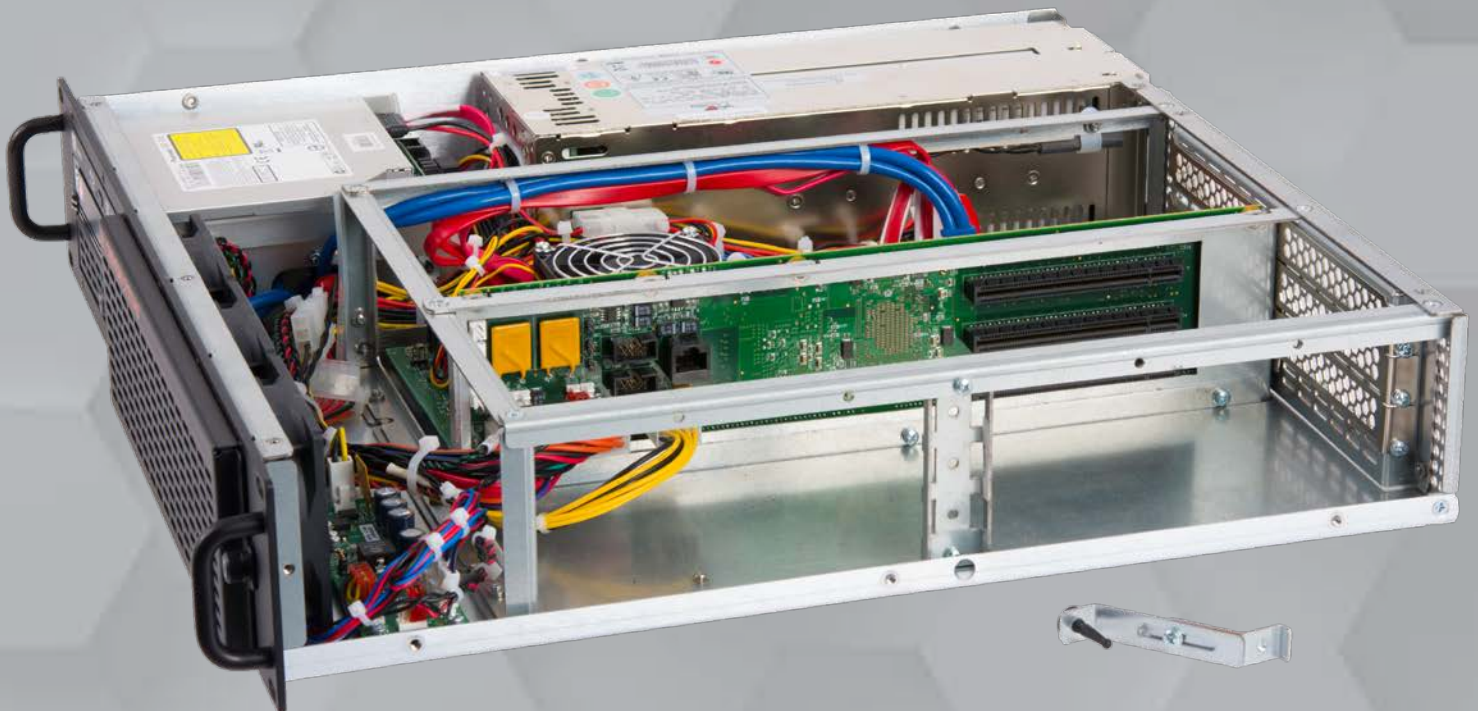


TRC20009
chassis

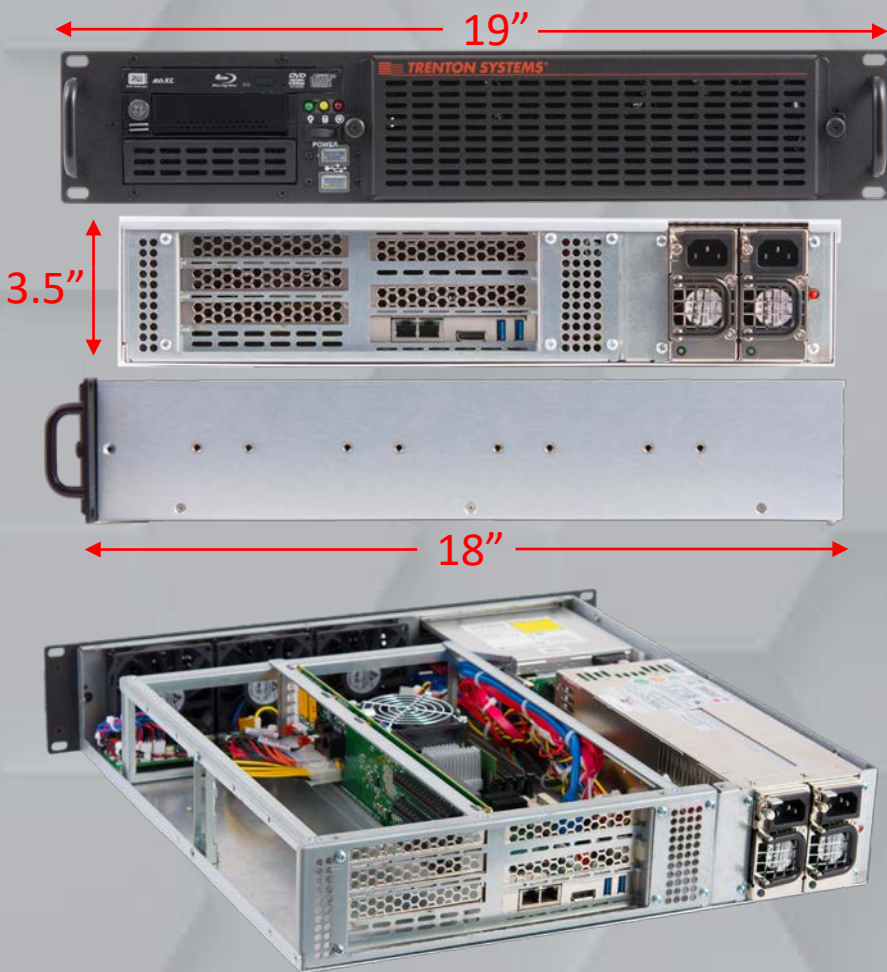

Vital Statistics – TRC2009	
Type	2U 19" Rackmount Chassis for PICMG 1.3 SHBs and Butterfly Backplanes
Depth	18"
Construction	Lightweight, Rugged Aluminum
Drive Bays	2 – 3.5" Front-Access Bays 1 – Slimline Optical
Power Supply Options (others upon request)	650W Fixed -or- 600W Redundant
Dimensions	19" (W) x 3.5" High x 18" (D)
Net Weight	24 lbs. (Chassis without option cards)
Connectivity	2 – USB Ports (front) Power Button Power, HDD, Fan Fail LEDs
Air Filter	Front-Access, Toolless, Replaceable

TRC2009 Features

- "Easy-Swap" Lid Provides Simplified Access to Option Cards
- Card Hold-Down System for Vibration Resistance

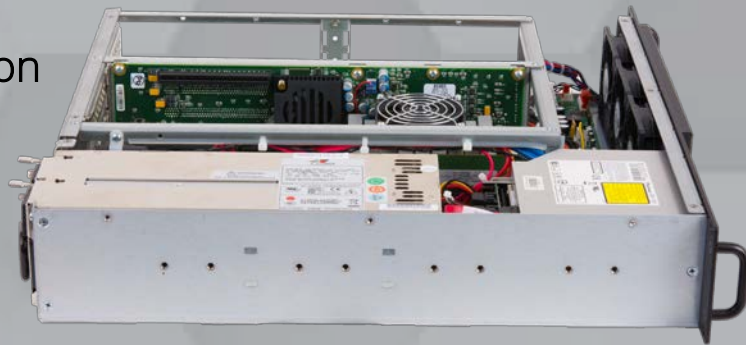

IoT Solutions Alliance

100% US Design & Assembly

27+ Years in Business

7+ Year Product Life Cycle

5 Year Warranty