


### WTM7026 MOTHERBOARD WITH SIX-CORE PROCESSORS

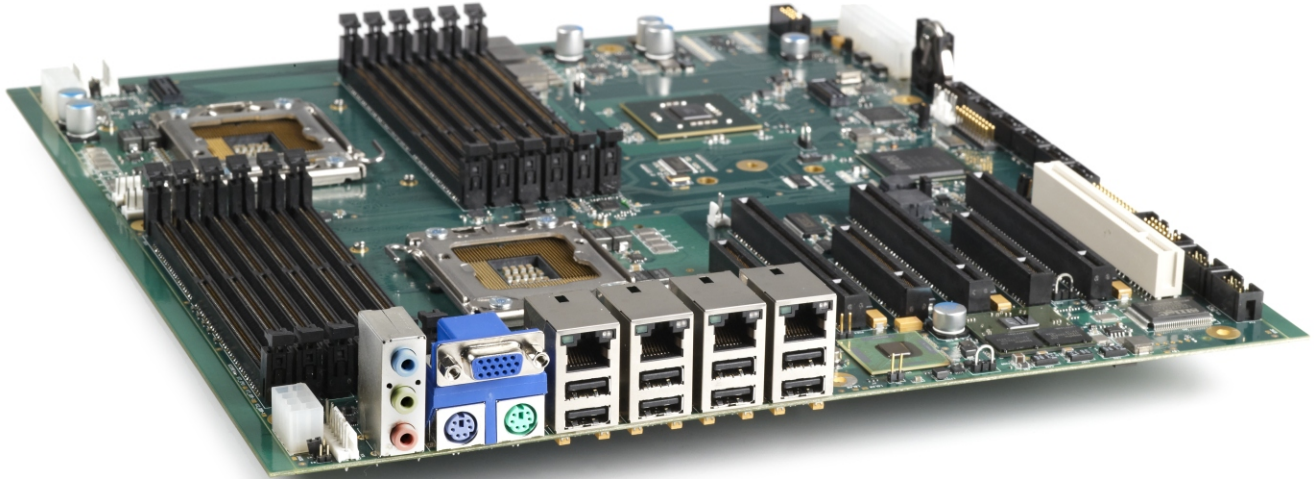

Trenton's WTM7026 is designed and built in the U. S. to deliver performance, data security and system longevity in embedded applications worldwide. The motherboard features extended-life, six-core or quad-core processors based on the Westmere-EP core. Here are some highlights of the Trenton WTM7026 embedded motherboard:

- ✓ Quad and Six-Core, Intel® Xeon® Series 5600 Processors
- ✓ Twelve, DDR3 DIMM slots (144GB max.)
- ✓ Trusted Computing support via TPM 1.2
- ✓ One x4 PCI Express Gen 1.1 card slot (electrical)
- ✓ Ten USB 2.0 interfaces
- ✓ Graphic Processing Unit (GPU)
- ✓ Audio Port
- ✓ Intel® TurboBoost
- ✓ Intel® 5520 Chipset with the Intel® ICH10R
- ✓ SSI-EEB Form Factor (12.0"/30.5cm x 13.0"/33.0cm)
- ✓ Three x8 PCI Express® Gen 2 card slots (electrical)
- ✓ One 32-bit/33MHz PCI card slot
- ✓ Six SATA II 300 ports with locking connectors
- ✓ PS/2 Mouse/Keyboard port
- ✓ Serial communication interfaces
- ✓ Intel® Hyper-Threading Technology
- ✓ Six, dual-channel DDR3-1333 memory interfaces
- ✓ SSI-EEB Enterprise Electronics Bay Specification 2008
- ✓ Two x4 PCI Express Gen 2 card slots (electrical)
- ✓ Four 10/100/1000Base-T Ethernet ports
- ✓ On-board SATA RAID support
- ✓ Video Port
- ✓ Intel® QuickPath Interconnect
- ✓ Intel® VT, Intel® VT-d and Intel® TXT Support

#### PROCESSORS:

Quad and Six-Core Intel® Xeon® Series 5600 Processors, Embedded core speeds of 2.0GHz - 2.4GHz\*  
Package: LGA 1366 socket *\*Higher speeds are supported*

The Intel® 5520 chipset and each Intel® Xeon® E5600 series processor on the WTM7026 supports the Intel® QuickPath Interconnect (QPI). The interface speed of an Intel® QPI is determined by the specific processor and is measured in Giga Transfers per second (GT/s). GT/s refers to how quickly data packets are transferred from a processor to the chipset or from processor-to-processor. The Intel® QPI enables the sharing of computing resources between processors and faster processor to chipset communications. Other processor features include:

- Quad-Core, 12MB Shared Last-Level Cache (LLC)
- Intel® Hyper-Threading enables 8 threads per processor
- Intel® VT, Intel® VT-d and Intel® TXT support with appropriate BIOS and application-level software
- Integrated Memory Controller (IMC) built into the processor for direct system memory connections
- Three, dual-channel DDR3 1333MHz memory interfaces per processor

#### CHIPSET:

Combining the Intel® 5520 Input Output Hub (IOH) with the Intel® ICH10R delivers chipset performance and functionality well suited for challenging embedded computing applications. Processor to IOH speeds of 4.8GT/s, 5.86GT/s and 6.4GT/s are supported and IOH to ICH10R communications are supported via the Controller Link (Clink) and the Enterprise Southbridge Interface (ESI). ESI features a x4 PCI Express® link with a transfer rate of 2.5Gbps between the IOH and the ICH10R. Many advanced I/O capabilities are built into this chipset combination including SATA RAID array support and direct option card slot interface capabilities that include PCI Express Gen 2, PCI Express Gen 1.1 and 32-bit/33MHz PCI.

#### DDR3-1333 MEMORY:

Each processor on the WTM7026 features three, dual channel DDR3-1333 system memory interface connections directly to six DIMM sockets for a total of twelve DDR3 DIMMs supported on the motherboard. PC3-10600, PC3-8500 or PC3-6400 DIMMs that are ECC registered, 72-bit, 240-pin gold-plated may be used. 144GB is the maximum memory capacity supported; however, memory market realities point to a practical maximum of 96GB.

#### OPTION CARD SLOTS:

A total of seven option card slots are supported on the Trenton WTM7026 motherboard.



- Three x16 PCI Express (PCIe) mechanical slots driven with x8 PCIe Gen 2 electrical links
- Two x8 PCIe mechanical slots driven with x4 PCIe Gen 2 links
- One x8 PCIe mechanical slot driven with a x4 PCIe Gen 1.1 link
- One 32-bit/33MHz PCI slot

#### STANDARDS:

- PCI Express® Base Specification 1.1 and 2.0
- PCI Local Bus Specification 2.3
- IEEE P996, Personal Computer Bus Standard
- SSI-EEB 2008 - Rev 1.0 (Extended ATX form factor std.)



Dependable, always.

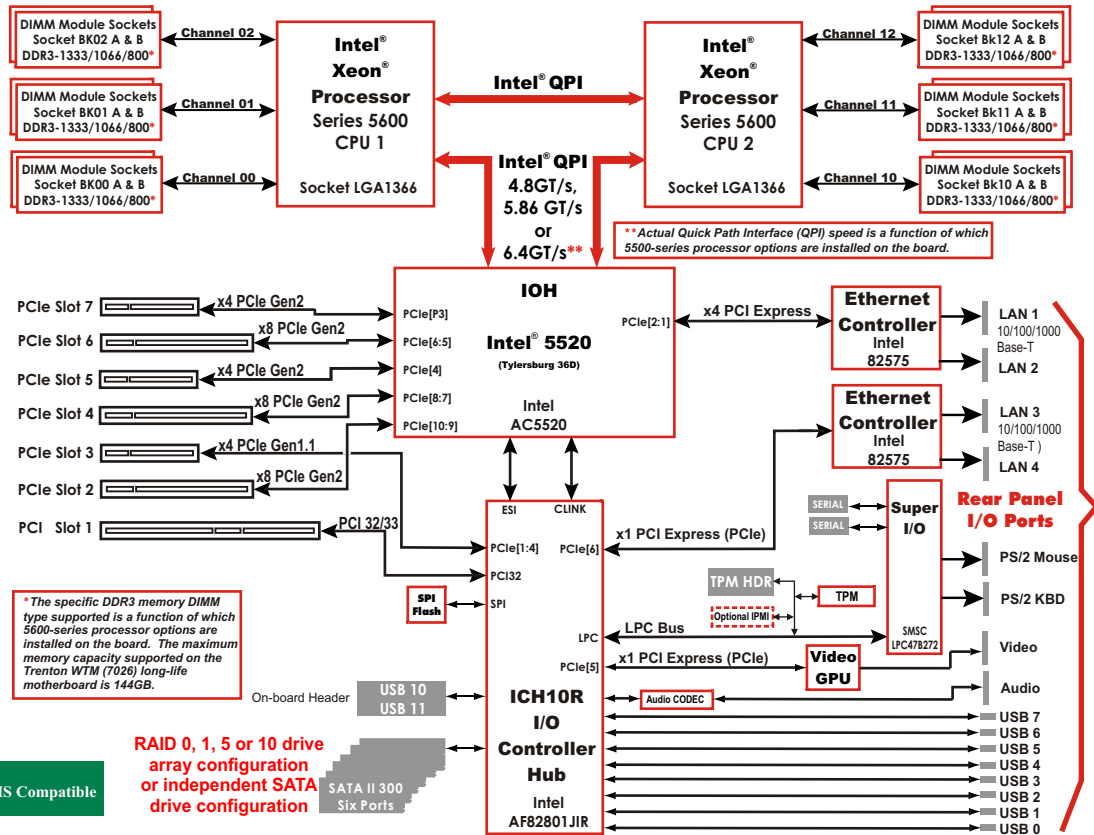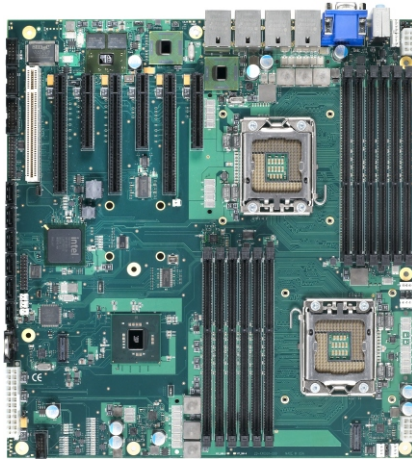

**RAID 0, 1, 5 or 10 drive array configuration or independent SATA drive configuration**

### FOUR ETHERNET INTERFACES - 10/100/1000BASE-T:

The WTM7026 features Ethernet connectivity that supports four Gigabit Ethernet ports on the board's rear panel I/O plate. RJ-45 connectors on the I/O plate provide the mechanical interface to these Ethernet networks.

### VIDEO INTERFACE - GRAPHIC PROCESSING UNIT (GPU):

The WTM7026's GPU uses 8MB of integrated video memory to support the motherboard's standard VGA video display port.

### SERIAL ATA/300 PORTS:

The integrated Serial ATA (SATA) controller inside the ICH10R provides six SATA II 300 ports with data transfer rates up to 300MB/s. Independent SATA drive operation and RAID 0, 1, 5 and 10 drive array configurations are supported. SATA technology provides lower pin counts, reduced signaling voltages, simplified cabling, CRC error detection and hot-plug device support.

### UNIVERSAL SERIAL BUS INTERFACES (USB 2.0):

There are a total of ten available USB 2.0 interfaces on the motherboard. USB ports 0 through 7 are located on the I/O plate and on-board headers contain ports 10 and 11.

### BIOS (FLASH):

The WTM7026 uses AMIBIOS® located in the motherboard's SPI flash devices. AMIBIOS8 contains features such as:

- Support for flash devices for BIOS upgrading
- Integrated support for USB mass storage devices such as USB, DVD-RW, CD-ROM, CD-RW, etc.
- Boot from network, USB mass storage devices, IDE or ATAPI
- Serial port console redirection to support headless operation

### WTM7026 APPLICATION CONSIDERATIONS:

#### Power Requirements:

Typical Values - 100% Stress State with 12GB of system memory

CPU	Intel® No.	+5V	+12V	+3.3V
2.4GHz	E5645*	4.61A	13.70A	2.15A
2.4GHz	E5620#	4.62A	13.39A	2.08A
2.0GHz	L5638*	4.61A	11.21A	2.04A

Typical Values - Static Desktop (Idle) with 12GB of system memory

CPU	Intel® No.	+5V	+12V	+3.3V
2.4GHz	E5645*	4.59A	7.77A	1.98A
2.4GHz	E5620#	4.62A	7.11A	1.96A
2.0GHz	L5638*	4.60A	7.60A	2.06A

-12V @ <100mA

Tolerance for all voltages is +/- 5%

Trenton recommends an EPS-style power supply for use with the WTM7026. Dual +12V power connectors are provided on the motherboard and must be used when using dual Intel® Xeon® Series 5600 processors and a large number of DIMMs.

#### Temperature/Environment:

Operating Temperature: 0° to 50° C.

Air Flow Requirement: 350LFM continuous airflow

Storage Temperature: -40° to 70° C.

Humidity: 5% to 90% non-condensing

#### Mechanical:

The Extended ATX form factor of the WTM7026 complies with the SSI-EEB 2008 - Rev 1.0 industry standard for overall board dimensions [12.0" (30.5cm) x 13.0" (33.1cm)] and mounting hole placements. The standard height cooling solution is designed for 2U and greater chassis heights. Contact Trenton if your system design requires a lower profile cooling solution.

### ADDITIONAL PRODUCT FEATURES:

#### I/O Features:

- Audio and video ports (I/O plate)
- PS/2 mouse and keyboard connector (I/O plate)
- Two high-speed serial ports (on-board header)

#### Security & Diagnostic Features:

- TPM 1.2 Trusted Computing capability
- Intel® TXT support
- Fan control, polling for health and status LED interfaces
- Optional IPMI support (on-board header)

### ORDERING INFORMATION:

Model #	CPU Speed	Intel® No.	Embedded CPU
<b>Model Name: WTM7026</b>			
507026-610-0G	2.4GHz	E5645*	Yes
507026-710-0G	2.4GHz	E5620#	Yes
507026-631-0G	2.0GHz	L5638*	Yes

(0G = Memory) \* = Six-core CPU # = Quad-core CPU

### AGENCY APPROVALS:

Designed for UL60950, CAN/CSA C22.2 No. 60950-00, EN55022:1998 Class B, EN61000-4-2:1995, EN61000-4-3:1997, EN61000-4-4:1995, EN61000-4-5:1995, EN61000-4-6:1996, EN61000-4-11:1994

The stated bus speed, memory and communication interface speeds are component maximums; actual system performance may vary.

Intel, Intel QPI, Intel Hyper-Threading, Intel VT, Intel VT-d, Intel TXT and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All other product names are trademarks of their respective owners.

Copyright ©2010 by TRENTON Technology Inc. All rights reserved

