


I-Pi SMARC Plus

SMARC 2.1 Carrier Board with M.2 Extension

Features

- SMARC revision 2.1 compliant
- Dual LVDS, DSI, HDMI and eDP (BOM option) graphic output interfaces
- M.2 E-Key and M.2 B-Key expansion slots
- Dual GbE ports and USB 2.0 / USB 3.0 interfaces
- Interchangeable audio codec interface
- 40-pin MRAA compliant signal header
- Rugged operating temperature (option): -40°C to +85°C
- 10 year product availability

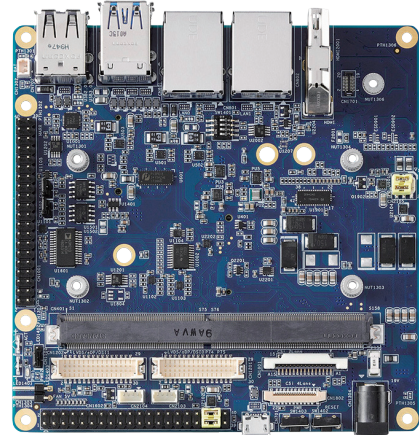

Specifications

• Video

HDMI

1x HDMI 1.4b / 2.0b

eDP

1x eDP 1.3 (bom option)

MIPI-DSI

1x MIPI-DSI 4 lanes

Cameras

1x MIPI-CSI dual lane interface
 1x MIPI-CSI quad lane interface

• Audio

Audio Codec

Interchangeable audio codec connector with I2S and HDA signals

• Dual Ethernet

Primary LAN

1x 10/100/1000 RJ45 connector

Secondary LAN

1x 10/100/1000 RJ45 connector

• Expansion Busses

PCIe

PCIe over M.2 connector

USB

2x USB 3.0, 2x USB 2.0, 1x USB 2.0 OTG connectors

UART

4x UART interfaces SER2 (TX/X/CTS/RTS) and SER0, SER1, SER3 (TX/RX)

CAN

2x CAN 2 interface pin headers

SPI

2x SPI pin headers

I²S

1x I²S interface to audio interface

I²C

2x I²C interface on pin header

GPIO

17x GPIO with interrupt on pin header

• Storage

SDIO

1x SDIO (4-bit) compatible with SD/SDIO standard, up to version 3.0

• Mechanical and Environmental

Form Factor

SGET SMARC Specifications 2.1

Dimensions

110 mm x 110 mm

Operating Temperature

Standard: 0°C to +60°C
 Rugged: -40°C to +85°C (optional)

Humidity

5-90% RH operating, non-condensing
 5-95% RH storage (and operating with conformal coating)


Shock and Vibration

IEC 60068-2-64 and IEC-60068-2-27, MIL-STD-202 F, Method 213B, Table 213-I, Condition A and Method 214A, Table 214-I, Condition D

HALT

Thermal Stress, Vibration Stress, Thermal Shock and Combined Test

Functional Diagram

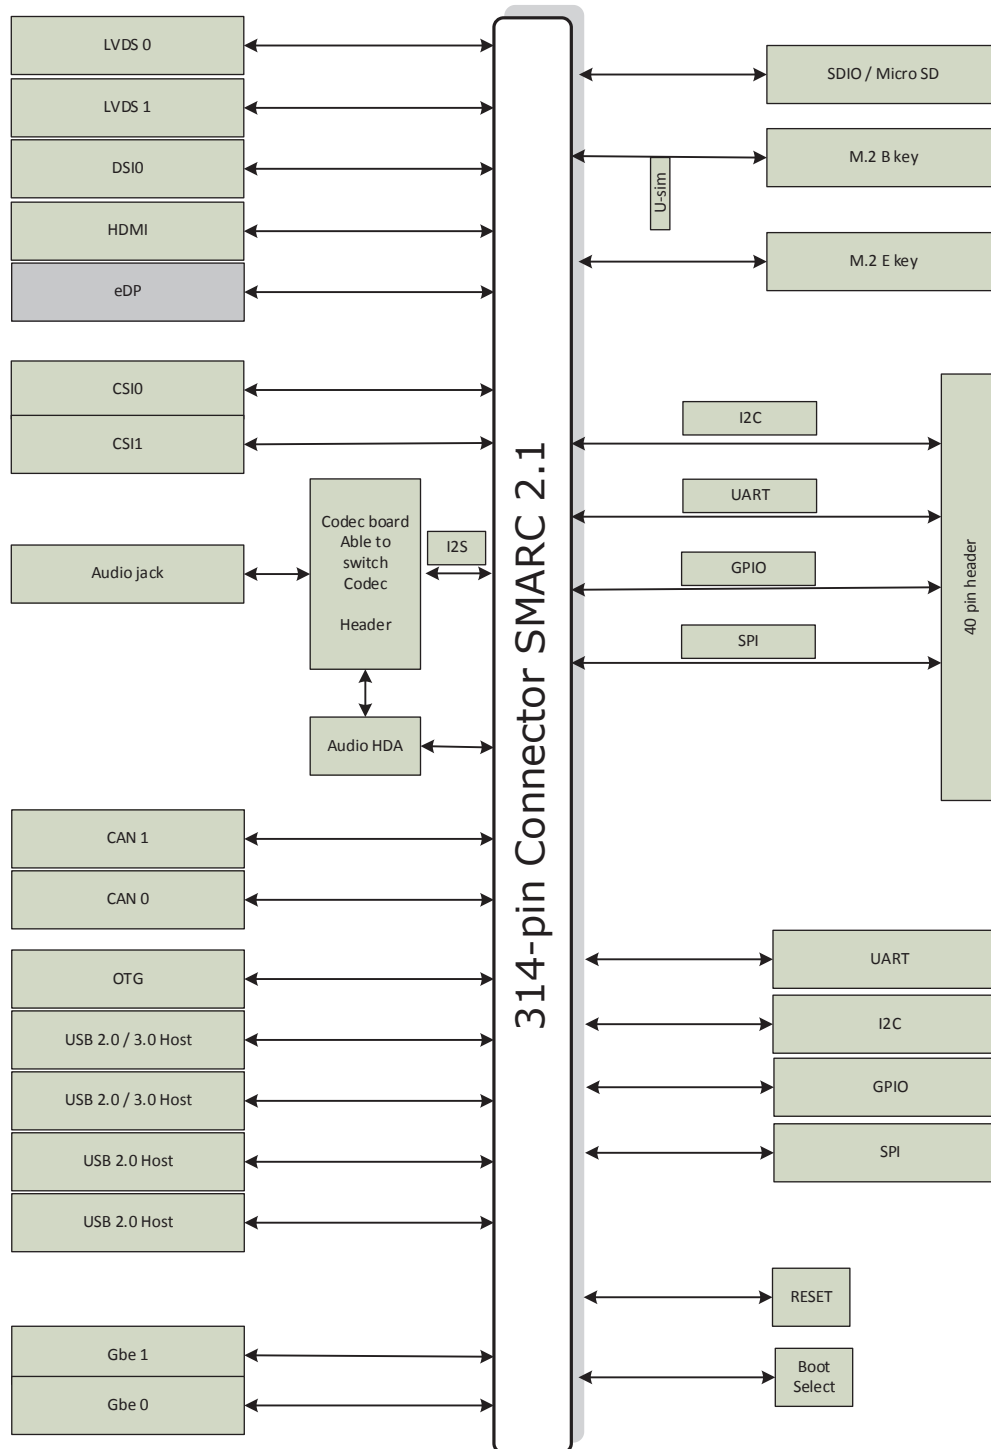

I-Pi SMARC Plus

Ordering Information

- **91-77A07-200E**
I-Pi SMARC Plus carrier for performance level SMARC 2.1 modules including add-on card with WOLFSON WM8960 I2S Audio codec
- **91-77A07-300E**
I-Pi SMARC Plus carrier for performance level SMARC 2.1 modules including add-on card with TI TLV320AIC3107IRSBT I2S Audio codec
- **91-77A07-400E**
I-Pi SMARC Plus carrier for performance level SMARC 2.1 modules including add-on card with Realtek ALC5640 I2S Audio codec