


APC341 Simultaneous A/D Conversion Analog Input

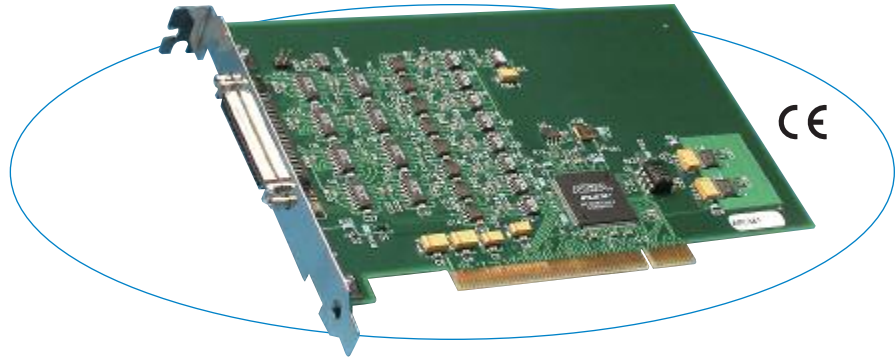

APC341 boards provide fast, high resolution, simultaneous A/D conversion of eight channels.

These boards have sixteen analog inputs which are sampled as two eight-channel banks. Eight A/D converters (ADCs) permit simultaneous conversion of all eight channels in a bank. All 16 channels share two generous 512-sample memory buffers. Conversion of each bank requires only 8 μ S, and all 16 channels can be sampled in just 16 μ S.

Flexible configuration options give you extensive control over the conversion process. The channels or bank to be converted, timing, scan mode, and other parameters are user-programmable. Interrupt support adds further control to interrupt upon a programmable threshold when the data in memory exceeds the set threshold.

Features

- 16 differential inputs (± 10 V DC input range)
- Eight 14-bit A/D converters with simultaneous multi-channel conversion
- 8 μ S conversion time (125KHz) for 8-channel bank
- Two 512-sample memory buffers
- Data tagging for channel identification
- Programmable conversion timer
- Programmable channel conversion control
- External trigger input and output
- Continuous and single-cycle conversion modes
- Interrupt generation for memory full threshold conditions
- Precision calibration voltages stored on-board
- CE-marked, FCC Part 15, Class B

Benefits

- Simultaneous channel conversion and on-board memory enable megahertz throughput rates.

This board is ideal for high-speed data acquisition. A large memory buffer reduces CPU interactions for increased overall performance.

Specifications

Analog Inputs

Input configuration: 16 differential channels.

A/D resolution: 14 bits.

Input range: ± 10 V.

Maximum throughput rate:

Eight channels can be simultaneously acquired.

One channel: 125KHz (8 μ S/conversion)

8 channels (same bank): 1MHz (8 μ S/8 channels)

16 channels (high & low banks): 1MHz (16 μ S/16 ch. at maximum 2.2K ohm source resistance).

Data sample memory: Two 512-sample memory buffers.

A/D triggers: Internal timer, external, and software.

Internal conversion timer: User-programmable delay between simultaneous conversion of 8-channel banks. Maximum delay is 2.09 second interval.

System accuracy: 2.4 LSB (0.014%).

Data format: Binary two's complement.

Overvoltage protection: ± 25 V (power on), ± 40 V (off).

Common mode rejection ratio (60Hz): 96dB typical.

Channel-to-channel rejection ratio (60Hz): 96dB typical.

Environmental

Operating temperature: 0 to 70°C
(E version -40 to 85°C).

Storage temperature: -55 to 105°C.

Relative humidity: 5 to 95% non-condensing.

MTBF: Consult factory.

Power: 265mA at +5V (320mA maximum).

PCI Bus Compliance

This device meets or exceeds all written PCI local bus specifications per rev. 2.2 dated December 1998.

System base address: This board operates in memory space. It consumes 4K of memory space.

Data transfer bus: Slave with 32, 16, and 8-bit data transfer operation.

Interrupts (INTA#): Interrupt A is used to request an interrupt.

Ordering Information

I/O Boards

APC341

Analog input board

APC341E

Same as APC341 plus extended temperature range

Software *(see software documentation for details)*

PMCSW-API-VXW

VxWorks® software support package

PCISW-API-QNX

QNX® software support package

PCISW-API-WIN

Windows® DLL Driver software package

PCISW-LINUX

Linux® support (website download only)

Accessories *(see accessories documentation for details)*

5028-378

Termination panel, SCSI-2 connector, 50 screw terminals

5028-438

Cable, shielded, SCSI-2 connector at both ends