


Datasheet

M.2 (S80) 3MG2-P series

- SATA III solution for industrial field
- iSMART disk health monitoring
- Intelligent error recovery system
- Excellent data transfer speed
- Zero mechanical interference
- Anti-vibration mechanical design

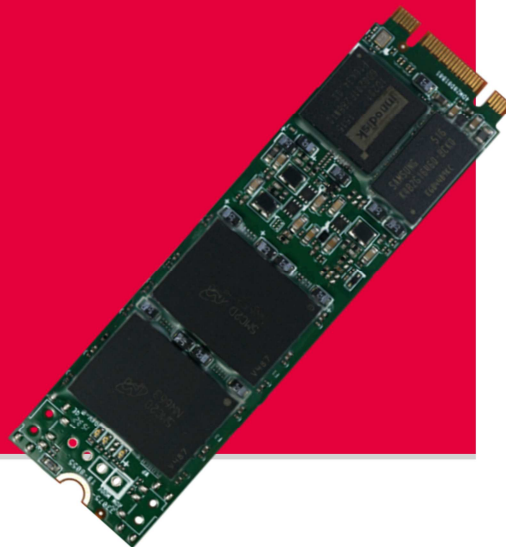

Introduction

Innodisk M.2 (S80) 3MG2-P is designed as the standard M.2 form factor with SATA interface, and supports SATA III standard (6.0Gb/s) with excellent performance. The form factor refers to the M.2(NGFF) specification which established by JEDEC. Regarding of mechanical interference, Innodisk M.2 (S80) 3MG2-P absolutely replaces the traditional hard disk and makes personal computer, in any field, smaller and easier.

Innodisk M.2 (S80) 3MG2-P effectively reduces the booting time of operation system and the power consumption is less than hard disk drive (HDD), and complies with ATA protocol, no additional drives are required, and can be configured as a boot device or data storage device



M.2 (S80) 3MG2-P series

Diagram

Contact us for more information about the M2 (S80) 3MG2-P.

16GB-512GB



Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.

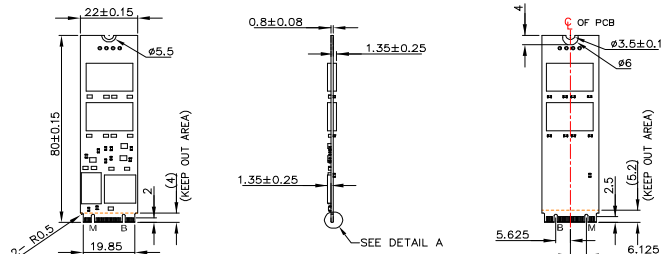

DETAIL A
SCALE 4:1

TOLERANCE: ±0.20 mm

1TB

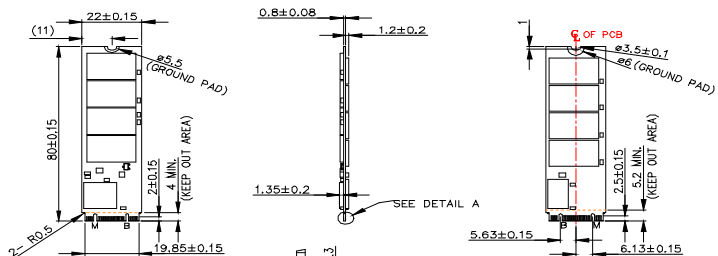

DETAIL A
SCALE 4:1

Headquarters (Taiwan)

5F., No.237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City 221,
Taiwan (R.O.C.)

Tel: +886-2-7703-3000

Email: sales@innodisk.com

Branch Offices:

USA

usasales@innodisk.com

+1-510-770-9421

Europe

eusales@innodisk.com

+31-40-3045-400

Japan

jpsales@innodisk.com

+81-3-6667-0161

China

sales_cn@innodisk.com

+86-755-21673689

www.innodisk.com

© 2017 Innodisk Corporation.

All right reserved. Specifications are subject to change without prior notice.

20170220

Specifications

Interface	SATA III
Flash Type	MLC
P/E cycle	3,000
Capacity	16GB~1TB
Max. Channels	4
Sequential R/W (MB/sec, max.)	530 / 450
Max. Power Consumption	4.6W (3.3V x 1.4A)
Thermal Sensor	✓
External DRAM buffer	✓
H/W Write Protect	Optional, 1TB→N/A
ATA Security	✓
S.M.A.R.T.	✓
Dimension (WxLxH)	22.0 X 80.0 X 3.5 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours

innodisk

www.innodisk.com

Ordering Information

Operation Temp.	16GB	32GB	64GB	128GB	256GB	512GB	1TB
Standard Grade (0°C ~ +70°C)	DGM28-16GD81SCASN	DGM28-32GD81SCADN	DGM28-64GD81SCAQN	DGM28-A28D81SCAQN	DGM28-B56D81SCAQN	DGM28-C12D81SCAQN	
		DGM28-32GD81BCBDC	DGM28-64GD81BCBQC	DGM28-A28D81BCBQC	DGM28-B56D81BCBQC	DGM28-C12D81BCBQC	DGM28-01TD81BCBQC
Industrial Grade (-40°C ~ +85°C)	DGM28-16GD81SWASN	DGM28-32GD81SWADN	DGM28-64GD81SWAQN	DGM28-A28D81SWAQN	DGM28-B56D81SWAQN	DGM28-C12D81SWAQN	
		DGM28-32GD81BWBDC	DGM28-64GD81BWBQC	DGM28-A28D81BWBQC	DGM28-B56D81BWBQC	DGM28-C12D81BWBQC	DGM28-01TD81BWBQC