

POS-104UL

4-port RS-232 Universal PCI board with power over serial



- > Over 800 Kbps data throughput, for top performance
- > Power options for each port: 5V (output), 12V (output), RI (input)
- > Serial port power from bus or power supply
- > 921.6 Kbps maximum baudrate for super fast data transmission
- > 128-byte FIFO and on-chip H/W, S/W flow control
- > Compatible with 3.3/5V PCI and PCI-X
- > Low profile board, suitable for compact-sized PCs
- > Drivers provided for Windows (2000, XP/2003/Vista/2008 x86/x64, 9X/ME/NT), Windows XP Embedded, Windows CE 5.0/6.0, DOS, Linux 2.4, Linux 2.6 (x86/x64), FreeBSD 4/5, QNX 6, SCO OpenServer 5/6, UnixWare 7
- > 15 KV ESD protection on the board
- > Wide temperature model available for -40 to 85°C environments

The certification logos shown here apply to some or all of the products in this section. For details, see "Regulatory Approvals" under "Specifications" below.



Overview

The POS-104UL is a smart, 4-port Universal PCI serial board designed for POS and ATM applications and for use by industrial automation system manufacturers and system integrators. The POS-104UL is compatible with all major operating systems. In addition, each of the board's 4 RS-232 serial ports supports data rates up to 921.6 Kbps,

and provides full modem control signals to ensure compatibility with a wide range of serial peripherals. The POS-104UL supplies 5 or 12 volts of power from each serial port, and works with both 3.3V and 5V PCI buses, making it suitable for installation in most PC servers.

Specifications

Hardware

Comm. Controller: MU860 (16C550C compatible)

Bus: 32-bit Universal PCI

Connector: DB44 female

Serial Interface

Number of Ports: 4

Serial Standards: RS-232

Max. No. of Boards per PC: 4

Serial Line Protection

ESD Protection: 15 KV on the board

Performance

Baudrate: 50 bps to 921.6 Kbps

Serial Communication Parameters

Data Bits: 5, 6, 7, 8

Stop Bits: 1, 1.5, 2

Parity: None, Even, Odd, Space, Mark

Flow Control: RTS/CTS, XON/XOFF

I/O Address: Assigned by BIOS

IRQ: Assigned by BIOS

Serial Signals

RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND, RI (optional)

Driver Support

Operating Systems: Windows (2000, XP/2003/Vista/2008 x86/x64, 9X/ME/NT), Windows XP Embedded, Windows CE 5.0/6.0, DOS, Linux 2.4, Linux 2.6 (x86/x64), FreeBSD 4/5, QNX 6, SCO OpenServer 5/6, UnixWare 7

Physical Characteristics

Dimensions: 64.4 x 120 mm (2.53 x 4.72 in)

Environmental Limits

Operating Temperature:

Standard Models: 0 to 55°C (32 to 131°F)

Wide Temp. Models: -40 to 85°C (-40 to 185°F)

Operating Humidity: 5 to 95% RH

Storage Temperature: -20 to 85°C (-4 to 185°F)

Regulatory Approvals

FCC: Part 15 Class B

EMS: EN55022, EN61000-6-2, EN61000-6-4, EN61000-3-2, EN61000-3-3, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11 (DIPS)

Power Requirements

Power Consumption: 145 mA @ +5 V


Power Output (per port): 1 A @ 5 V, 1 A @ 12 V

Warranty

Warranty Period: 5 years

Details: See www.moxa.com/warranty

Dimensions

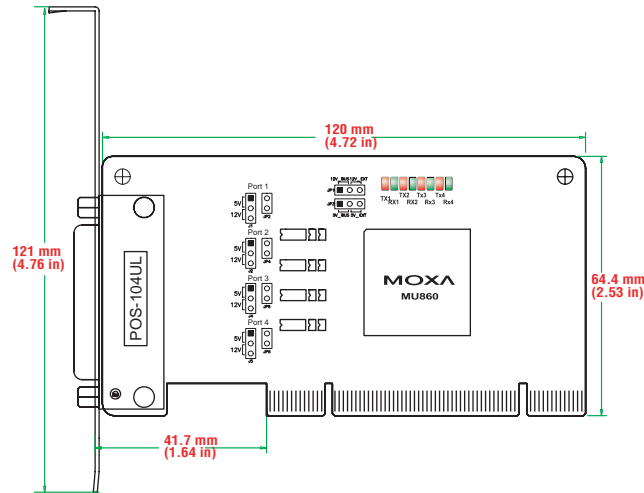

: Ordering Information

Available Models

POS-104UL-DB9: 4-port RS-232 low profile Universal PCI board with serial port power, 0 to 55°C operating temperature (DB9 male cable included)

POS-104UL-T: 4-port RS-232 low profile Universal PCI board with serial port power, -40 to 85°C operating temperature

Package Checklist

- POS-104UL board
- Low profile bracket
- DB9 male cable (POS-104UL-DB9 only)
- Document and Software CD
- Quick Installation Guide (printed)
- Warranty Card

Connection Options (can be purchased separately)

CBL-M44M9x4-50 (POS)



PIN	RS-232
1	DCD
2	RxD
3	TxD
4	DTR
5	GND
6	DSR
7	RTS
8	CTS
9	5V/12V/RI

DB9 male

